

PUFF

STANDARD SPECIFICATIONS

PAN

Aluminum construction, die punch formed with mounting pads and toolless entry clips. The pan is finished with a high reflectance white powder coat.

DIFFUSER

Translucent, UV stabilized white acrylic. The diffuser is molded in the familiar puff shape and is designed to be installed with clips.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 875 lm. Non-dimming.
 B12 - 12W nominal, .10 A input - 1730 lm. Dimmable (0-10V).
 C09 - 9W nominal, .10 A input - 1220 lm. Dimmable (0-10V).


MOUNTING

Directly to j-box (by others). Mounting hardware included.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

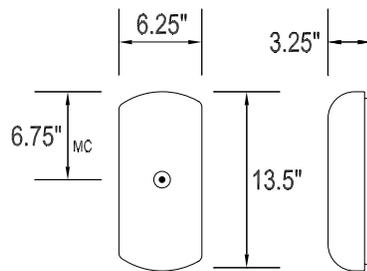

DAMP



ORDERING INFORMATION

1042 - _____ - _____ - _____
 Model 2. 3. 4. (if required)

2. WATTAGE

B06 6W B Series LED
B12 12W B Series LED
C09 9W C Series LED

3. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

3. AVAILABLE OPTIONS

90R⁹ 90 CRI (3000K only)
BAC¹ Buy American Compliant
DTR⁴ Triac (Line Voltage) Dimming (120V) (All except B06)
ES⁶ ENERGY STAR® (Not available in 90 CRI)
FCL⁷ French Canadian Label
T24⁹ Title 24 JA8 Compliant (B12 in 3000K only)

Notes: (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24. (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or T24. (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24. (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC.
Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

