

NT finish

1276 LED

The REVOLVE interior sconce collection features a matte acrylic cylindrical diffuser, an aluminum housing / inset end caps in your choice of finish, and dedicated field serviceable LED components. Perfect for general illumination in corridors/elevator lobbies and bathroom vanity applications. This series can be mounted horizontally or vertically. The REVOLVE-“D” indicates the dual direction cylinder. For a single direction cylinder, refer to the REVOLVE-S (Model #: 1270).

FINISHES



REVOLVE-D

STANDARD SPECIFICATIONS

HOUSING

Aluminum tube with a cold rolled steel canopy and mount plate.

DIFFUSER

Extruded UV stabilized frosted acrylic. 2.75" dia. cylinder. The diffuser contains inset end caps which match the specified finish.

LED PERFORMANCE

3500K standard, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
H13 - 13W nominal, .11 A input - 1253 lm. Dimmable (Triac). 120V Only.
H16 - 16W nominal, .14 A input - 1356 lm. Dimmable (0-10V). 120-277V.

MOUNTING

Fixture mounts directly to a j-box (by others). Can be mounted horizontally or vertically.

FINISH

Available in all Brownlee paint finishes as a standard offering.
Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



NT finish

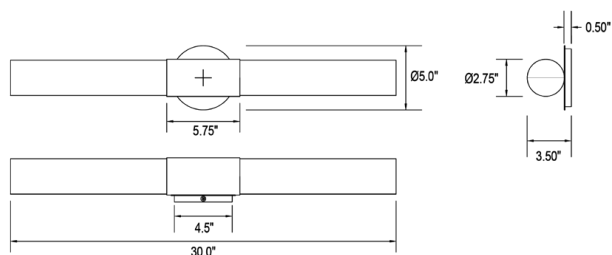

ORDERING INFORMATION

1276 - - - - -
Model 2. 3. 4. 5.



DAMP



2. FINISH

STANDARD

BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

ANTIMICROBIAL

Available in a select number of finishes.
Refer to the Options section of this sheet
for details ("AMF").

3. WATTAGE

H13 13W H Series LED
H16 16W H Series LED

4. COLOR TEMPERATURE

35K 3500K standard color temperature
30K 3000K color temperature
40K 4000K color temperature

5. AVAILABLE OPTIONS

AMF Antimicrobial Finish (BL, NT, WH only)
(See AMF note)
BAC¹ Buy American Compliant
FCL⁷ French Canadian Labels
T24⁹ Title 24 JA8 Compliant (H16 only)

AMF Note: Antimicrobial powder coat is applied to the exposed metal fixture parts and can inhibit the growth of mildew and spoilage causing microbes on the finish.

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.