FULTON

BROWNLEE



2654 LED -

The 2654 LED offers a balance between traditional and contemporary, making it perfect for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. The aircraft cables can be specified in three different positions to fit the aesthetic needs of the space. This unit provides a generous amount of indirect uplight in addition to downlight.

FINISHES





FULTON

STANDARD SPECIFICATIONS

BOWL

Smooth UV stabilized white acrylic. The 24" bowl is formed from 0.188" material, while the 30" bowl utilizes 0.250" stock.

TRIM

The trim consists of a formed, cold rolled steel ceiling canopy, stainless steel aircraft cables, three solid brass finials, and a steel stem.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs Amperage rated @ 110V input Operating ambient temperature: -20° C / -4° F - 40° C / 104° F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs. 24 Size: R23 - 23W nominal, .19 A input - 2359 lm. Dimmable (0-10V). 24/30 Size: R34 - 34W nominal, .28 A input - 3475 lm. Dimmable (0-10V). 24/30 Size: R49 - 49W nominal, .41 A input - 4617 lm. Dimmable (0-10V).

MOUNTING


Directly to j-box (by others). Mounting hardware included.

FINISH

The 2654 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

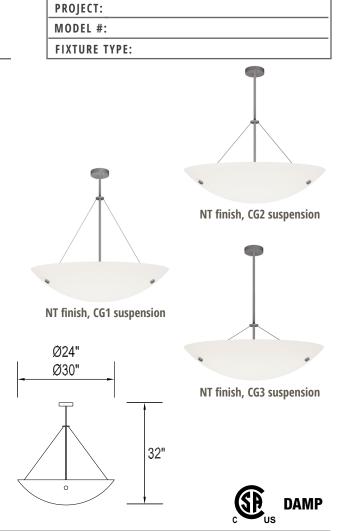

ORDERING INFORMATION

2654 Model	2. 3.	- <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>5.</u>	- -	7. (if required)
2. SIZE	3. FINISH	4. WATTAGE	5. SUSPENSION	6. COLOR TEMPERATURE
 24 24" dia. 30 30" dia. 	STANDARD BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	24 SIZER2323W R Series LEDR3434W R Series LEDR4949W R Series LED30 SIZE34W R Series LEDR4949W R Series LEDR4949W R Series LED	CG1 Cable Guide - High CG2 Cable Guide - Mid CG3 Cable Guide - Low	 35K 3500K standard color temperature 27K 2700K color temperature 30K 3000K color temperature 40K 4000K color temperature 7. AVAILABLE OPTIONS 90R⁰ 90 CRI (30K & 35K only) BAC¹ Buy American Compliant DTR⁴ Triac (Line Voltage) Dimming (120V) ES⁶ ENERGY STAR® (Not available in 90 CRI) FCL⁷ French Canadian Labels SVL Swivel Canopy
ACCESSORIES (FIELD INSTALLED)				
ORDERING NUMBER	DESCRIPTION			
390002XX	Stem Extension Kit: includes	s (1) 1' stem and (2) 2' stems. 5' com	bined max. Specify finish (xx)	

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. 1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BB, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BLD. (3) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. Add'I Notes: *BBI/BBC-BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: 20C/4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



REVISED 2023.06.15