

5178

STANDARD SPECIFICATIONS

HOUSING

Cold rolled steel, die-formed, and assembled with hardware and welds. The housing can be mounted horizontal or vertical.

DIFFUSER

Translucent, UV stabilized white acrylic. The extruded material can withstand minor impact without breaking. The decorative end caps are attached with hardware.

ELECTRICAL

T5 Linear Fluorescent, bipin lamp (by others) – 120-277V Electronic HPF Ballast
 T5HO Linear Fluorescent, bipin lamp (by others) – 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Fixture mounts directly to a 2x4 j-box (by others) and has a j-box cover included.


FINISH

The 5178 series is finished in brushed nickel as a standard. It is available in all Brownlee paint finishes as an optional offering. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

PROJECT:
MODEL #:
FIXTURE TYPE:



BN finish

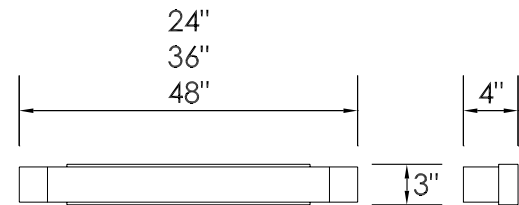

DAMP



ORDERING INFORMATION

5178 - _____ - _____ - _____ - _____ - _____
 Model 2. 3. 4. 5. (if required)

2. SIZE

24 L: 24"
36 L: 36"
48 L: 48"

3. FINISH

STANDARD
BN Brushed Nickel

OPTIONAL

BL Black
BT Brass Tone
BZ Bronze
GM Gun Metal
MB Metallic Bronze
NT Nickel Tone
PL Platinum
WH White

CUSTOM

Provide color sample or RAL code to match

4. WATTAGE

24 SIZE
14L 1-14W T5, elec. HPF
24L 1-24W T5HO, elec. HPF

36 SIZE
21L 1-21W T5, elec. HPF
39L 1-39W T5HO, elec. HPF

48 SIZE
28L 1-28W T5, elec. HPF
54L 1-54W T5HO, elec. HPF

5. AVAILABLE OPTIONS

BAC Buy American Compliant