

7060

STANDARD SPECIFICATIONS

HOUSING

The injection molded polycarbonate housing resists damage and is lightweight for smaller poles.

DIFFUSER

The acorn is one of the most recognizable street lamps in use today. This classic design is molded from UV stabilized frosted acrylic.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp - 120-277V Electronic HPF Ballast
 Triple CFL, 4-pin GX24Q Base 2700K lamp - 120-277V Electronic HPF Ballast
 High Pressure Sodium, Medium Base - 120V Magnetic NPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

The 7060 series has a fitter designed for 3" outside diameter poles.


FINISH

This series is available in a standard black polyester powder coat.

PROJECT:

MODEL #:

FIXTURE TYPE:

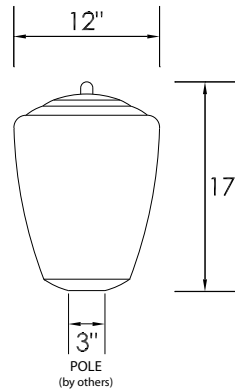

WET

ORDERING INFORMATION

7060

Model

2.

3. (if required)

2. WATTAGE

213Q 2-13W Quad CFL, elec. HPF
26Q 1-26W Quad CFL, elec. HPF


32T 1-32W Triple CFL, elec. HPF
42T 1-42W Triple CFL, elec. HPF

50S 50W HPS, 120V NPF
70S 70W HPS, 120V NPF
100S 100W HPS, 120V NPF
150S 150W HPS, 120V NPF

3. AVAILABLE OPTIONS

BAC Buy American Compliant
ES ENERGY STAR® (26Q only)

FIELD INSTALLED ACCESSORIES (order separately)

ORDERING NUMBER	DESCRIPTION	DIMENSIONS	NOTES
 154204	Wall Mounted Arm, Die-cast aluminum construction, Black polyester powder coat finish	12.5"w x 6"h x 4.5"d	Must be mounted with anchors (by others) appropriate for the mounting surface (100 lb minimum support)

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.