

7065 LED

STANDARD SPECIFICATIONS

HOUSING

Heavy duty die-cast aluminum design with an architectural profile for any decor.

DIFFUSER

Available in two decorative acorn shapes. Both versions are molded from sturdy UV stabilized frosted acrylic with a diffusing pattern designed in the surface to minimize glare.

LED PLATFORM

The 7065 series utilizes Brownlee's proprietary LED tower platform, which consists of plug and play LED components positioned at a downward angle to maximize illumination on the ground and general area, while minimizing wasted up-light. All electrical components are serviceable.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F
 Refer to Wattage section for lumen output. Consult Brownlee.com for performance of all CCTs.

MOUNTING

The 7065 series has a fitter designed for 3" outside diameter poles.

FINISH

This series is available in black polyester powder coat as standard, and in all Brownlee paints as an optional offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

7065 - _____
 Model 2. 3. 4. 5. (if required)

2. FINISH

STANDARD
BP Black Polyester

OPTIONAL
AB Antique Bronze
AS Antique Silver
BT Brass Tone
BZ Bronze
DB Desert Bronze
GM Gun Metal
MB Metallic Bronze
NT Nickel Tone
PL Platinum
WH White

3. WATTAGE

C49LED 49W C Series LED, .40 A input, 5100 delivered lumens
 Replaces up to 70W MH
C66LED 66W C Series LED, .54 A input, 7189 delivered lumens
 Replaces up to 100W MH

*Delivered lumens noted in 3500K.

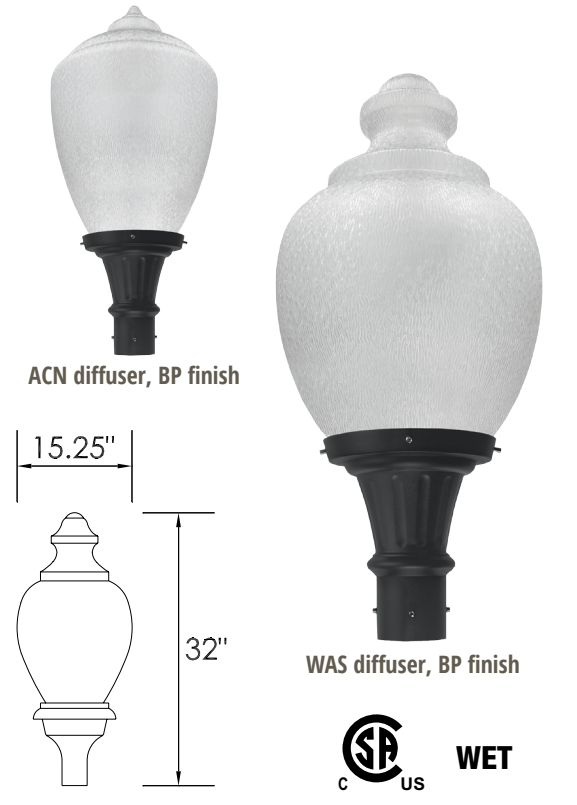
4. DIFFUSER

ACN Standard Acorn Style
WAS Washington Acorn Style



5. AVAILABLE OPTIONS

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature
BAC Buy American Compliant
HSS House-side Shield
PO1 Photo Control (120V)
PO2 Photo Control (208, 240, 277V)
SRG Surge Protection (10,000 A discharge current)

PROJECT:
MODEL #:
FIXTURE TYPE:



FIELD INSTALLED ACCESSORIES (order separately)

ORDERING NUMBER	DESCRIPTION	DIMENSIONS	NOTES
 154204	Wall Mounted Arm, Die-cast aluminum construction, Black polyester powder coat finish	12.5"w x 6"h x 4.5"d	Must be mounted with anchors (by others) appropriate for the mounting surface (100 lb minimum support)
 154204XX	Wall Mounted Arm, Die-cast aluminum construction, Available in all Brownlee paint finishes (specify when ordering)	12.5"w x 6"h x 4.5"d	Must be mounted with anchors (by others) appropriate for the mounting surface (100 lb minimum support)

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.