

79001 LED

STANDARD SPECIFICATIONS

HOUSING

Durable die-cast aluminum construction. Housing is composed of two parts with a hinged door for ease of maintenance with a continuous gasket to prevent water intrusion. IP65 Rated.

DIFFUSER

Tempered, clear prismatic borosilicate glass diffuser is designed to maximize light output and overall efficiency.

LED PERFORMANCE

120-277V - 4000K, 82 CRI - L70 rating - 76,000 hrs (projected)
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F
 Refer to Wattage section for lumen output.

MOUNTING

The 79001 is designed to be mounted directly to the surface and wired with rear conduit entry. Additional knockout ports are available for surface conduit entry on both sides and the bottom.


FINISH

This series is available in a standard bronze polyester powder coat. Select Brownlee paint finishes are also available as an option.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

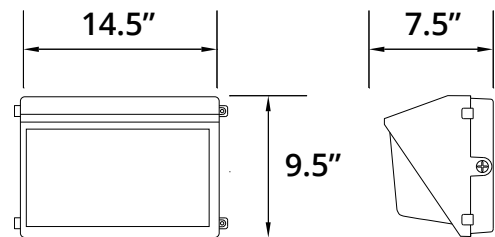

ORDERING INFORMATION

79001 - - - - -
 Model 2. 3. 4. 5.

2. SIZE	3. FINISH	4. WATTAGE	5. CCT
MD Medium	STANDARD BZ Bronze OPTIONAL BL Black GM Gun Metal NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	P50LED 50W P Series LED, .52 A input, 5969 delivered lumens Replaces up to 175W MH* P80LED 80W P Series LED, .85 A input, 9804 delivered lumens Replaces up to 250W MH* *Based on luminaire lumen output	40K 4000K

FIELD INSTALLED ACCESSORIES (order separately)

ORDERING NUMBER	DESCRIPTION	NOTES
910037	Photocell (120-277V)	Universal voltage photocell. Field installed (by others).

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.



ISSUED
2017.12.14

