

PUFF

DISCONTINUED
REFER TO MODEL #: 1040
FOR COMPARABLE ALTERNATE.

STANDARD SPECIFICATIONS

PAN

Aluminum construction, die punch formed with mounting pads and toolless entry clips. The pan is finished with a high reflectance white powder coat.

DIFFUSER

Translucent, UV stabilized white acrylic. The diffuser is molded in the familiar puff shape and is designed to be installed with clips.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 875 lm. Non-dimming.

B12 - 12W nominal, .10 A input - 1730 lm. Dimmable (0-10V).


C09 - 9W nominal, .10 A input - 1220 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

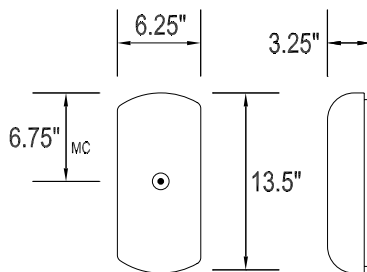

DAMP



ORDERING INFORMATION

1042 - _____ - _____ - _____
Model 2. 3. 4. (if required)

2. WATTAGE

B06	6W B Series LED
B12	12W B Series LED
C09	9W C Series LED

3. COLOR TEMPERATURE

35K	3500K standard color temperature
27K	2700K color temperature
30K	3000K color temperature
40K	4000K color temperature

3. AVAILABLE OPTIONS

90R⁰	90 CRI (3000K only)
BAC¹	Buy American Compliant
DTR⁴	Triac (Line Voltage) Dimming (120V) (All except B06)
ES⁶	ENERGY STAR [®] (Not available in 90 CRI)
FCL⁷	French Canadian Label
T24⁹	Title 24 JA8 Compliant (B12 in 3000K only)

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

 **BROWNLEE**
LIGHTING
www.brownlee.com

REVISED
2021.09.07