

1140 **DISCONTINUED**

STANDARD SPECIFICATIONS

HOUSING

The housing is injection molded polycarbonate to resist damage, and is impervious to rust.

DIFFUSER

The one piece design is an injection molded, smooth white or clear, ribbed UV stabilized acrylic. The diffuser also features molded threads, creating an effective seal when the jar is installed.

ELECTRICAL

GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 1140 series is available in either black or white molded material

PROJECT:

MODEL #:


FIXTURE TYPE:



WH finish, WA diffuser



BL finish, CPA diffuser

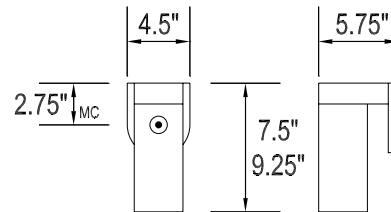

WET

ORDERING INFORMATION

1140 - _____ - _____ - _____ - _____ - _____ - _____
 Model 2. 3. 4. 5. 6. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. AVAILABLE OPTIONS
7 L: 7.5"	BL Black	7 SIZE	CPA Clear Pismatic Acrylic	BAC Buy American Compliant
9 L: 9.25"	WH White	13G 1-13W GU24 CFL, elec. NPF	WA White Acrylic	PO1 Photo Control (120V)
		9 SIZE		
		13G 1-13W GU24 CFL, elec. NPF		
		18G 1-18W GU24 CFL, elec. NPF		

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.