

# 1/2 CAPITOL

**DISCONTINUED**  
CONTACT FACTORY FOR  
STOCK AVAILABILITY

## STANDARD SPECIFICATIONS

### TRIM

Molded, sturdy polyurethane decorative ring, painted in any of the standard Brownlee finishes.

### DIFFUSER

Translucent, UV stabilized white acrylic, injection molded in the familiar puff shape with a uniform thickness throughout. The diffuser is held in position with spring loaded clips.

### PAN

Steel, die-formed construction with formed ring to keep the surface off the wall, and finished in a high reflectance white powder coat.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 613 lm. Non-dimming.

B12 - 12W nominal, .10 A input - 1212 lm. Dimmable (0-10V).

C09 - 9W nominal, .10 A input - 854 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The 1385 series is available in all Brownlee paint finishes as a standard offering.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

## ORDERING INFORMATION

**1385** -          2.          3.          4.          5. (if required)         

Model

### 2. FINISH

#### STANDARD

<b>BL</b>	Black
<b>BZ</b>	Bronze
<b>GM</b>	Gun Metal
<b>MB</b>	Metallic Bronze
<b>NT</b>	Nickel Tone
<b>PL</b>	Platinum
<b>WH</b>	White

#### CUSTOM

Provide color sample or RAL code to match

### 3. WATTAGE

<b>B06</b>	6W B Series LED
<b>B12</b>	12W B Series LED
<b>C09</b>	9W C Series LED


### 4. COLOR TEMPERATURE

<b>35K</b>	3500K standard color temperature
<b>27K</b>	2700K color temperature
<b>30K</b>	3000K color temperature
<b>40K</b>	4000K color temperature

### 4. AVAILABLE OPTIONS

<b>90R<sup>0</sup></b>	90 CRI (3000K only)
<b>BAC<sup>1</sup></b>	Buy American Compliant
<b>DTR<sup>4</sup></b>	Triac (Line Voltage) Dimming (120V) (All except B06)
<b>ES<sup>6</sup></b>	ENERGY STAR <sup>®</sup> (Not available in 90 CRI)
<b>FCL<sup>7</sup></b>	French Canadian Labels
<b>T24<sup>9</sup></b>	Title 24 JA8 Compliant (B12 in 3000K only)

PROJECT:
MODEL #:
FIXTURE TYPE:

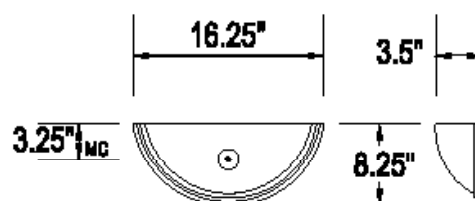

**DAMP**



Notes: (1) 90R - cannot be combined with ES. (2) BAC - cannot be combined with FCL. (3) BBL/BBS/BBC - cannot be combined with BCL, BXT, or T24. (4) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (5) BCL - cannot be combined with BBL, BBS, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBL, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, BCL, BXT, OCC, or T24. (11) PCH/PCB - cannot be combined with BLD or OCC. Add'l Notes: \*BBL/BBS/BBC - standard BBL (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

**Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.

