

FOUR SQUARE

**DISCONTINUED
CONTACT FACTORY
FOR AVAILABLE STOCK**

STANDARD SPECIFICATIONS

FRAME

Cold rolled steel, roll formed and assembled with rivets. The assembly has multiple stiffening edges for durability.

DIFFUSER

Translucent, UV stabilized, white acrylic. The material is flexible to withstand minor impact without breaking.

PAN

Formed, cold rolled steel design, finished with a powder coat high reflectance white paint. The pan has four standoffs, resulting in a halo of light around the wall.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 700 lm - 117 lm/W. Non-dimming.

B12 - 12W nominal, .10 A input - 1430 lm - 123 lm/W. Dimmable (0-10V).

C09 - 9W nominal, .10 A input - 1200 lm - 144 lm/W. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 2050 lm - 132 lm/W. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 2950 lm - 131 lm/W. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.


FINISH

The 1535 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

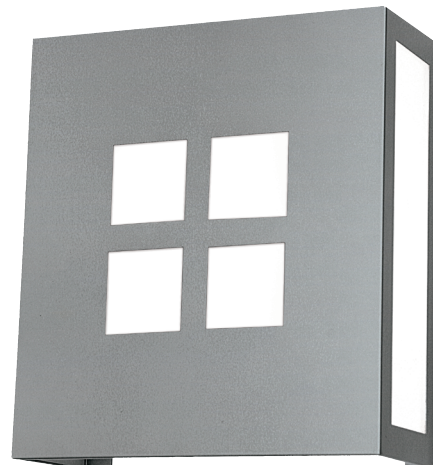

NT finish

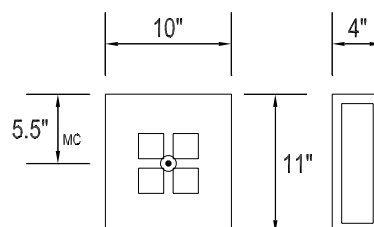

DAMP



ORDERING INFORMATION

1535 - - - - -
Model 2. 3. 4. 5. (if required)

2. FINISH

STANDARD

AB Antique Bronze
AS Antique Silver
BL Black
BZ Bronze
DB Desert Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

B06 6W B Series LED
B12 12W B Series LED

C09 9W C Series LED
C17 16W C Series LED
C24 23W C Series LED

4. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

5. AVAILABLE OPTIONS

90R⁹ 90 CRI (3000K only)
BAC¹ Buy American Compliant
DTR⁴ Triac (Line Voltage) Dimming (120V)(All except B06)
ES⁶ ENERGY STAR[®] (Not available in 90 CRI)
FCL⁷ French Canadian Labels
T24⁹ Title 24 JA8 Compliant (B12 & C24 in 3000K only)

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE
LIGHTING
www.brownlee.com

REVISED
2021.12.15