

# ASCEND

**DISCONTINUED**  
Contact factory for  
possible leftover stock

## STANDARD SPECIFICATIONS

### HOUSING

Cold rolled steel, roll formed and assembled using a series of spot welds and hardware. Multiple interior braces provide rigidity and stability. The housing can be mounted horizontal or vertical.

### DIFFUSER

Translucent, UV stabilized white acrylic. The material is flexible to withstand minor impact without breaking.

### PAN

Formed, cold rolled steel design, finished with a powder coat high reflectance white paint.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 369 lm. Non-dimming.  
B12 - 12W nominal, .10 A input - 729 lm. Dimmable (0-10V).  
C09 - 9W nominal, .10 A input - 514 lm. Dimmable (0-10V).  
C17 - 16W nominal, .15 A input - 1054 lm. Dimmable (0-10V).  
C24 - 23W nominal, .20 A input - 1446 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The 1567 series is available in all Brownlee paint finishes as a standard offering.


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



PL finish

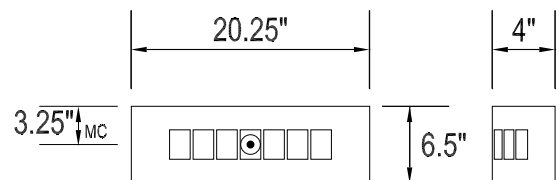

DAMP



## ORDERING INFORMATION

**1567** - 2. - 3. - 4. - 5.

2. FINISH	3. WATTAGE	4. COLOR TEMPERATURE	5. AVAILABLE OPTIONS
<b>STANDARD</b> <b>AB</b> Antique Bronze <b>AS</b> Antique Silver <b>BL</b> Black <b>BZ</b> Bronze <b>DB</b> Desert Bronze <b>GM</b> Gun Metal <b>MB</b> Metallic Bronze <b>MG</b> Metallic Gold <b>NT</b> Nickel Tone <b>PL</b> Platinum <b>WH</b> White  <b>OPTIONAL</b> <b>BN</b> Brushed Nickel  Note: BN finish to be discontinued on this model - contact factory for availability.  <b>CUSTOM</b> Provide color sample or RAL code to match	<b>B06</b> 6W B Series LED <b>B12</b> 12W B Series LED  <b>C09</b> 9W C Series LED <b>C17</b> 16W C Series LED <b>C24</b> 23W C Series LED	<b>35K</b> 3500K standard color temperature <b>27K</b> 2700K color temperature <b>30K</b> 3000K color temperature <b>40K</b> 4000K color temperature	<b>90R<sup>0</sup></b> 90 CRI (3000K only) <b>BAC<sup>1</sup></b> Buy American Compliant <b>DTR<sup>4</sup></b> Triac (Line Voltage) Dimming (120V)(All except B06) <b>ES<sup>6</sup></b> ENERGY STAR® (Not available in 90 CRI) <b>FCL<sup>7</sup></b> French Canadian Label <b>T24<sup>9</sup></b> Title 24 JA8 Compliant (B12 & C24 in 3000K only)

**Notes:** (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.  
**Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

