

# CLOUD [GROOVE]

**DISCONTINUED**  
REFER TO MODEL #: 2045 FOR  
ALTERNATE. CONTACT FACTORY  
FOR AVAILABLE STOCK.

PROJECT:

MODEL #:

FIXTURE TYPE:

## STANDARD SPECIFICATIONS

### PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features nut inserts for attaching the diffuser.

### DIFFUSER

Translucent, UV stabilized frosted acrylic. Diffuser is molded in the familiar round puff shape and provides a uniform thickness throughout.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1613 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 2331 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 3198 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH


The 2047 series is standard in a high reflectance white powder coat finish. Also available in an optional black.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.



WH finish

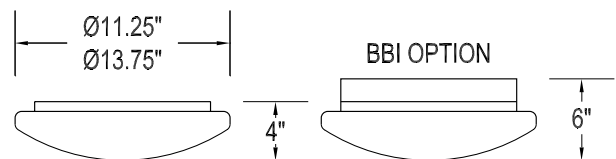

DAMP



## ORDERING INFORMATION

2047		-	-	-	-	-	6. (if required)
Model		2.	3.	4.	5.		
2. SIZE		3. FINISH		4. WATTAGE		5. COLOR TEMPERATURE	
11	11.25" dia.	WH	STANDARD	11 SIZE	35K	3500K standard color temperature	
14	13.75" dia.		White	B12	12W B Series LED	27K	2700K color temperature
			OPTIONAL	14 SIZE	30K	3000K color temperature	
		BL	Black	B12	12W B Series LED	40K	4000K color temperature
				C17	16W C Series LED		
				C24	23W C Series LED		
6. AVAILABLE OPTIONS							
				90R <sup>0</sup>	90 CRI (3000K only)		
				BAC <sup>1</sup>	Buy American Compliant		
				BBI <sup>2*</sup>	Integral Battery Backup (14 size only) (Adds 2" to depth)		
				BLD <sup>3**</sup>	Bi-Level Dimming (14 size only)		
				DTR <sup>4</sup>	Triac (Line Voltage) Dimming (120V)		
				ES <sup>6</sup>	ENERGY STAR® (Not available in 90 CRI)		
				EXT	Extended Housing (Intended to match BBI aesthetic) (Adds 2" to depth) (14 size only)		
				FCL <sup>7</sup>	French Canadian Labels		
				OCC <sup>8</sup>	Occupancy Sensor (14 size only)		
				T24 <sup>9</sup>	Title 24 JA8 Compliant (B12 & C24 in 3000K only)		

**Notes:** (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10°C/50°F. BBC option has a minimum operating temperature of -20°C/-4°F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

**Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.