

2310 LED

DISCONTINUED
REFER TO 2300
SPEC SHEET

STANDARD SPECIFICATIONS

TRIM

Molded, sturdy polyurethane decorative ring. The finial is solid brass, and all trim is available painted in any of the standard Brownlee finishes.

DIFFUSER

Translucent, UV stabilized white acrylic, injection molded in the familiar puff shape with a uniform thickness throughout. The diffuser is held in position with spring loaded clips.

PAN

Steel, die-formed construction with formed ring to keep the surface off the wall, and finished in a high reflectance white powder coat.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1317 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 2091 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 2869 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2310 is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



NT finish

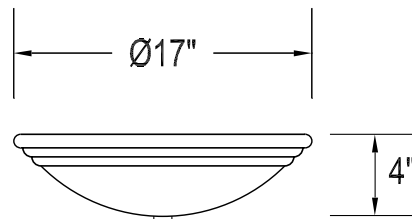

DAMP



ORDERING INFORMATION

2310

Model

2.

3.

4.

5. (if required)

2. FINISH

STANDARD

BL	Black
BZ	Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
PL	Platinum
WH	White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

B12	12W B Series LED
C17	16W C Series LED
C24	23W C Series LED

4. COLOR TEMPERATURE

35K	3500K standard color temperature
27K	2700K color temperature
30K	3000K color temperature
40K	4000K color temperature

5. AVAILABLE OPTIONS

90R ⁰	90 CRI (3000K only)
BAC ¹	Buy American Compliant
BLD ^{3**}	Bi-Level Dimming
DTR ⁴	Triac (Line Voltage) Dimming (120V)
ES ⁶	ENERGY STAR® (Not available in 90 CRI)
FCL ⁷	French Canadian Labels
OCC ⁸	Occupancy Sensor
T24 ⁹	Title 24 Compliant (B12 & C24 in 3000K only)

Notes: (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, DTR, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.