

REVO

DISCONTINUED

Contact factory for availability. Refer to model#: 2081 for comparable alternate.

STANDARD SPECIFICATIONS

PAN

Cold rolled steel design, formed with spinning tooling into a distinctive style with a mounting ring. The pan has diffuser clips riveted in position.

DIFFUSER

Translucent, UV stabilized white acrylic. Diffuser is injection molded to allow a uniform thickness of 0.06" throughout. The diffuser snaps into position under the pan's lower lip.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1317 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 1903 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 2869 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2320 series is available in a standard powder coat white or electroplated brushed nickel. Optional finishes include all Brownlee paints.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



BN Finish

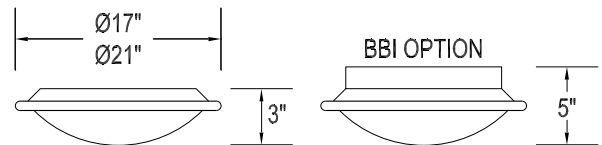

ORDERING INFORMATION



2320 - Model 2. 3. 4. 5. 6. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS
17 17" dia.	STANDARD	17 SIZE	35K 3500K standard color temperature	90R⁰ 90 CRI (3000K only)
21 21" dia.	BN Brushed Nickel	B12 12W B Series LED	27K 2700K color temperature	BAC¹ Buy American Compliant
	WH White	C17 16W C Series LED	30K 3000K color temperature	BBI^{2*} Integral Battery Backup (Adds 2" to depth)
	OPTIONAL	C24 23W C Series LED	40K 4000K color temperature	BLD^{3**} Bi-Level Dimming
	BL Black	21 SIZE		DTR⁴ Triac (Line Voltage) Dimming (120V)
	BZ Bronze	C17 16W C Series LED		ES⁶ ENERGY STAR® (Not available in 90 CRI)
	GM Gun Metal	C24 23W C Series LED		EXT Extended Housing (Intended to match BBI aesthetic) (Adds 2" to depth)
	MB Metallic Bronze			FCL⁷ French Canadian Labels
	MG Metallic Gold			OCC⁸ Occupancy Sensor
	NT Nickel Tone			T24⁹ Title 24 JA8 Compliant (B12 & C24 in 3000K only)
	PL Platinum			
	CUSTOM			
	Provide color sample or RAL code to match			

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE
LIGHTING
www.brownlee.com

REVISED
2020.12.22