

TWO-TIER

DISCONTINUED
REFER TO MODEL 2340 FOR
ALTERNATE - contact factory
for available stock.

PROJECT:

MODEL #:

FIXTURE TYPE:

STANDARD SPECIFICATIONS

PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and seat" installation of the diffuser.

DIFFUSER

Translucent, UV stabilized white acrylic. The two tier drum shape features a twist on the classic lampshade look. The material is bonded to walls of the drum, and is available in multiple styles.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1200 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 1734 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 2379 lm. Dimmable (0-10V).

C37 - 35W nominal, .30 A input - 3530 lm. Dimmable (0-10V).

C49 - 45W nominal, .40 A input - 4758 lm. Dimmable (0-10V).

MOUNTING


Directly to j-box (by others). Mounting hardware included.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.



WHL diffuser

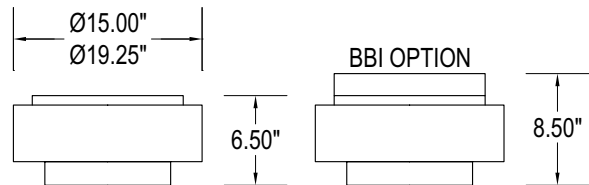

DAMP



ORDERING INFORMATION

2342

Model

2.

3.

4.

5.

6. (if required)

2. SIZE

15 15" dia.
20 19.25" dia.

3. WATTAGE

15 SIZE

B12 12W B Series LED
C17 16W C Series LED
C24 23W C Series LED

20 SIZE

C24 23W C Series LED
C37 35W C Series LED
C49 45W C Series LED

4. DIFFUSER

NAL Natural Linen
WHL White Linen

*NOTE: MAL & ROW have
been discontinued on
this model - contact
factory for availability.

5. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

6. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant
BBI^{2*} Integral Battery Backup (Adds 2" to depth)

BLD^{3**} Bi-Level Dimming
DTR⁴ Triac (Line Voltage) Dimming (120V)
ES⁵ ENERGY STAR[®] (Not available in 90 CRI)
EXT Extended Housing (Intended to match BBI aesthetic)
(Adds 2" to depth)

FCL⁷ French Canadian Labels
OCC⁸ Occupancy Sensor
T24⁹ Title 24 JA8 Compliant (B12, C24 & C49 in 3000K only)

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24.
(3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24.
(5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24.
(8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI,
BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating
temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50%
(factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

 **BROWNLEE**
LIGHTING
www.brownlee.com

REVISED
2021.12.13