

2346 LED

UPGRADED
SEE MODEL 2604

STANDARD SPECIFICATIONS

TRIM

Cold rolled steel stem and canopy, and additional aircraft cable accents. All trim pieces available in any Brownlee finish.

DIFFUSER

Translucent, UV stabilized white acrylic. The two tier drum shape features a twist on the classic lampshade look. The material is bonded to walls of the drum, and is available in multiple styles.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Source lumens noted. Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

C37LED - 37W nominal, .30 A input - 3641 lm - 99 lm/W

C49LED - 49W nominal, .40 A input - 4876 lm - 100 lm/W

MOUNTING

Directly to j-box (by others). Mounting hardware included.


FINISH

The 2346 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

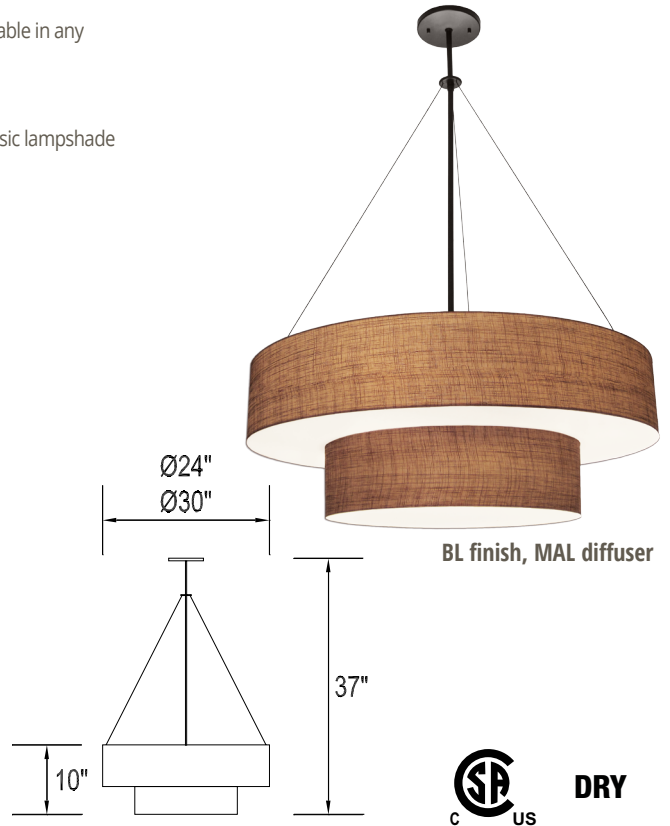

ORDERING INFORMATION

2346

Model 2. 3. 4. 5. 6. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. AVAILABLE OPTIONS
24 24" dia.	STANDARD	C37LED 3-C Series boards	MAL Mahogany Linen	27K 2700K color temperature C37LED - 3080 lm - 83 lm/W C49LED - 4124 lm - 84 lm/W
30 30" dia.	AG Antique Gold	C49LED 4-C Series boards	NAL Natural Linen	30K 3000K color temperature C37LED - 3512 lm - 95 lm/W C49LED - 4702 lm - 96 lm/W
	BL Black		ROW Rolling Waves	40K 4000K color temperature C37LED - 3707 lm - 100 lm/W C49LED - 4702 lm - 96 lm/W
	BR Brick		WHL White Linen	BAC Buy American Compliant
	BZ Bronze			DALI Dali Compatible (0-10v dimming included) (C49LED only)
	DS Desert Stone			DIM Dimming driver (120-277V) (0-10V dimming control required)
	GM Gun Metal			ES ENERGY STAR®
	MB Metallic Bronze			SVL Swivel Canopy / Slope Ceiling
	NT Nickel Tone			
	OL Oak Leaf			
	PL Platinum			
	RB Rustic Bronze			
	RC Rustic Copper			
	WH White			
	CUSTOM			
	Provide color sample or RAL code to match			

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

2346

STANDARD SPECIFICATIONS

UPGRADED
SEE MODEL 2604

PROJECT:
MODEL #:
FIXTURE TYPE:

TRIM

Cold rolled steel stem and canopy, and additional aircraft cable accents. All trim pieces available in any Brownlee finish.

DIFFUSER

Translucent, UV stabilized white acrylic. The two tier drum shape features a twist on the classic lampshade look. The material is bonded to walls of the drum, and is available in multiple styles.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
Triple CFL, 4-pin GX24Q Base 2700K lamp – 120-277V Electronic HPF Ballast
GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast
FT CFL, 4-pin 2G11 Base 3000K lamp – 120-277V Electronic HPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING


Directly to j-box (by others). Mounting hardware included.

FINISH

The 2346 series is available in all Brownlee paint finishes as a standard offering.

ORDERING INFORMATION

2346	-	-	-	-	-	-
Model	2.	3.	4.	5.	6. (if required)	

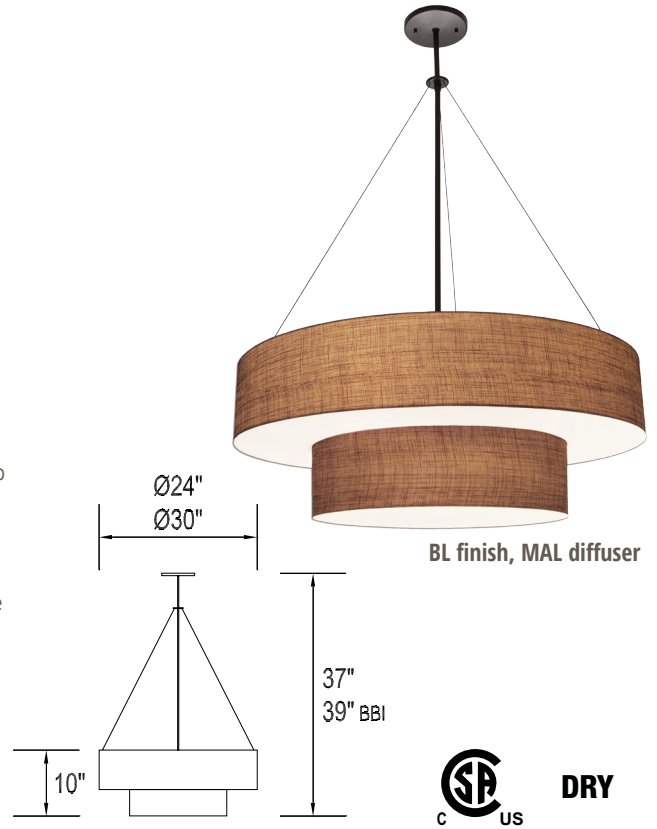

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. AVAILABLE OPTIONS
24 24" dia. 30 30" dia.	<p>STANDARD</p> <p>AG Antique Gold BL Black BR Brick BZ Bronze DS Desert Stone GM Gun Metal MB Metallic Bronze NT Nickel Tone OL Oak Leaf PL Platinum RB Rustic Bronze RC Rustic Copper WH White</p> <p>CUSTOM Provide color sample or RAL code to match</p>	<p>24 & 30 SIZE</p> <p>413Q 4-13W Quad CFL, elec. HPF 418Q 4-18W Quad CFL, elec. HPF 326Q 3-26W Quad CFL, elec. HPF 426Q 4-26W Quad CFL, elec. HPF</p> <p>332T 3-32W Triple CFL, elec. HPF 432T 4-32W Triple CFL, elec. HPF 342T 3-42W Triple CFL, elec. HPF 442T 4-42W Triple CFL, elec. HPF</p> <p>413G 4-13W GU24 CFL, elec. NPF 318G 3-18W GU24 CFL, elec. NPF 418G 4-18W GU24 CFL, elec. NPF</p> <p>30 SIZE</p> <p>436F 4-36/39W FT CFL, elec. HPF</p>	<p>MAL Mahogany Linen NAL Natural Linen ROW Rolling Waves WHL White Linen</p>	<p>BAC Buy American Compliant BBI¹ Integral Battery Backup (Q & T only, adds 2" to depth) DIM1 Dimming Ballast (120V) (Q & T only) DIM2 Dimming Ballast (277V) (Q & T only) ES3 ENERGY STAR® (elec., NPF) (G only) ES4 ENERGY STAR® (elec., HPF) (Q only) SVL Swivel Canopy / Slope Ceiling</p>

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.