

2348 LED

UPGRADED
SEE MODEL 2612

STANDARD SPECIFICATIONS

TRIM

Cold rolled steel stem and canopy, and stainless steel aircraft cable accents. All trim pieces are available in any Brownlee finish.

HOUSING

Manufactured using cold rolled steel with a baked on, high reflectance white finish.

DIFFUSER

Translucent, UV stabilized clear acrylic. The drum insert features a distinctive pattern to fit the desired décor.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Source lumens noted. Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

C37LED - 37W nominal, .30 A input - 3641 lm - 99 lm/W
C49LED - 49W nominal, .40 A input - 4876 lm - 100 lm/W
H63LED - 63W nominal, .53 A input - 8056 lm - 130 lm/W

Dimming Notes: H-Series LED comes standard with dimming driver. See options code "DIM" for C-Series LED dimming.

MOUNTING

The 2348 is designed to be mounted directly to a j-box (by others).

FINISH

The 2348 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

2348

Model 2. 3. 4. 5. 6. (if required)

2. SIZE

24 24" dia.
30 30" dia.
36 36" dia.
42 42" dia.
48 48" dia.

3. FINISH

STANDARD
AG Antique Gold
BL Black
BR Brick
BZ Bronze
DS Desert Stone
GM Gun Metal
MB Metallic Bronze
NT Nickel Tone
OL Oak Leaf
PL Platinum
RB Rustic Bronze
RC Rustic Copper
WH White

CUSTOM
Provide color sample or RAL code to match

4. WATTAGE


24, 30 & 36 SIZE
C37LED 3-C Series boards
C49LED 4-C Series boards
42 & 48 SIZE
H63LED 4-H Series boards

5. DIFFUSER

BMB Bamboo
GDM Gold Mesh
PER Pearl
SAP Sapphire

6. AVAILABLE OPTIONS

27K 2700K color temperature
C37LED - 3080 lm - 83 lm/W
C49LED - 4124 lm - 84 lm/W
30K 3000K color temperature
C37LED - 3512 lm - 95 lm/W
C49LED - 4702 lm - 96 lm/W
H63LED - 8056 lm - 130 lm/W
40K 4000K color temperature
C37LED - 3707 lm - 100 lm/W
C49LED - 4702 lm - 96 lm/W
H63LED - 8549 lm - 135 lm/W
BAC Buy American Compliant
DALI Dali Compatible (0-10v dimming included) (C49LED only)
DIM Dimming driver (120-277V) (0-10V dimming control required) - Standard in H-Series LED - DIM code not required
ES ENERGY STAR®
SSM Single Stem Mount (24 size only)

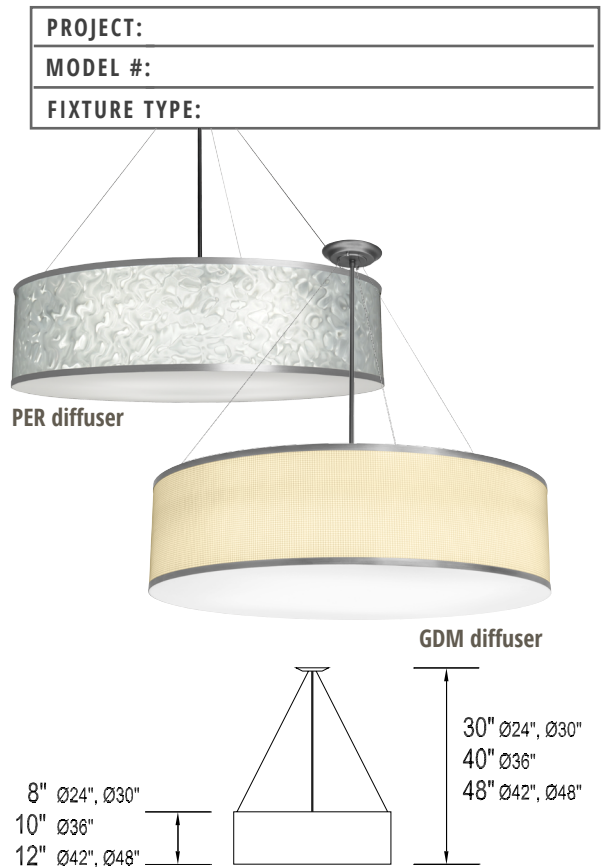

Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

2348

STANDARD SPECIFICATIONS

UPGRADED
SEE MODEL 2612

TRIM

Cold rolled steel stem and canopy, and stainless steel aircraft cable accents. All trim pieces are available in any Brownlee finish.

HOUSING

Manufactured using cold rolled steel with a baked on, high reflectance white finish.

DIFFUSER

Translucent, UV stabilized clear acrylic. The drum insert features a distinctive pattern to fit the desired décor.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
Triple CFL, 4-pin GX24Q Base 2700K lamp – 120-277V Electronic HPF Ballast
GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast
FT CFL, 4-pin 2G11 Base 3000K lamp – 120-277V Electronic HPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.


MOUNTING

The 2348 is designed to be mounted directly to a j-box (by others).

FINISH

The 2348 series is available in all Brownlee paint finishes as a standard offering.

| |
|---------------|
| PROJECT: |
| MODEL #: |
| FIXTURE TYPE: |

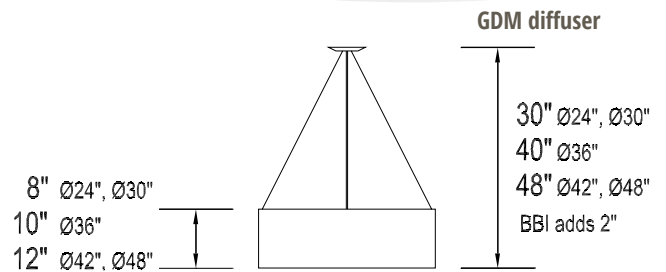

DRY

ORDERING INFORMATION

2348 - Model - 2. - 3. - 4. - 5. - 6. (if required)

2. SIZE

24 24" dia.
30 30" dia.
36 36" dia.
42 42" dia.
48 48" dia.

3. FINISH

STANDARD
AG Antique Gold
BL Black
BR Brick
BZ Bronze
DS Desert Stone
GM Gun Metal
MB Metallic Bronze
NT Nickel Tone
OL Oak Leaf
PL Platinum
RB Rustic Bronze
RC Rustic Copper
WH White

CUSTOM
Provide color sample or RAL code to match

4. WATTAGE

24 & 30 SIZE
413Q 4-13W Quad CFL, elec. HPF
418Q 4-18W Quad CFL, elec. HPF
326Q 3-26W Quad CFL, elec. HPF
426Q 4-26W Quad CFL, elec. HPF
332T 3-32W Triple CFL, elec. HPF
432T 4-32W Triple CFL, elec. HPF
342T 3-42W Triple CFL, elec. HPF
442T 4-42W Triple CFL, elec. HPF
413G 4-13W GU24 CFL, elec. NPF
318G 3-18W GU24 CFL, elec. NPF
418G 4-18W GU24 CFL, elec. NPF
30, 36, 42 & 48 SIZE
436F 4-36/39W FT CFL, elec. HPF

5. DIFFUSER

BMB Bamboo
GDM Gold Mesh
PER Pearl
SAP Sapphire

6. AVAILABLE OPTIONS

BAC Buy American Compliant
BBI¹ Integral Battery Backup (Q & T only, adds 2" to depth)
DIM1 Dimming Ballast (120V) (Q & T only)
DIM2 Dimming Ballast (277V) (Q & T only)
ES3 ENERGY STAR® (elec., NPF) (G only)
ES4 ENERGY STAR® (elec., HPF) (Q only)
SSM Single Stem Mount (24 size only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.