

5027 LED

STANDARD SPECIFICATIONS

HOUSING

Cold rolled steel, die-formed, welded assembly. The housing can be mounted horizontal or vertical.

DIFFUSER

UV stabilized frosted acrylic. Diffuser is extruded with formed ribs for diffusing the light source and adding a distinct appearance. The material can withstand minor impact without breaking.

MOUNT PLATE

Cold rolled steel, die-formed and zinc finished to resist rust. Plate provides a stable platform to mount the fixture to the wall.

LED PERFORMANCE

120-277V - 3500K, 82 CRI - L70 rating - 54,000 hours
 Source lumens noted. Amperage rated @ 110V input
 Dimming compatible - 0-10V control required
 Max ambient temperature - 40°C / 104°F

E20LED - 20W nominal, .17 A input - 2111 lm - 104 lm/W

E37LED - 37W nominal, .31 A input - 4115 lm - 113 lm/W

MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH

The 5027 is available with a sleek polished chrome electroplated surface. Plated finishes such as Chrome are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

5027 - _____ - _____ - _____
 Model 2. 3. 4. (if required)

2. SIZE

27 L: 27"
51 L: 51"

3. WATTAGE


27 SIZE
E20LED 1-E Series board

51 SIZE
E37LED 2-E Series boards

4. AVAILABLE OPTIONS

30K 3000K color temperature
 E20LED - 2068 lm - 102 lm/W
 E37LED - 4030 lm - 111 lm/W
40K 4000K color temperature
 E20LED - 2155 lm - 106 lm/W
 E37LED - 4199 lm - 115 lm/W
BAC Buy American Compliant
CO Convenience Outlet (120V)
ES ENERGY STAR® listed
PC Pull Chain (120V)

PROJECT:
MODEL #:
FIXTURE TYPE:

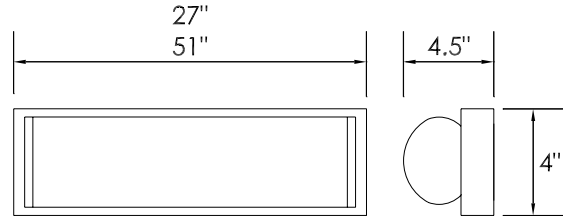

DAMP



5027




Stylish chrome luminaire with frosted ribbed lens is available in a variety of lamp and ballast combinations.

STANDARD SPECIFICATIONS

- HOUSING:** Steel, chrome finish
- DIFFUSER:** Extruded frosted ribbed acrylic
- BALLAST:** 120-277V HPF Electronic
- LAMP:** Linear fluorescent (T8)

DISCONTINUED
CHECK FACTORY STOCK

PROJECT:
MODEL #:
FIXTURE TYPE:

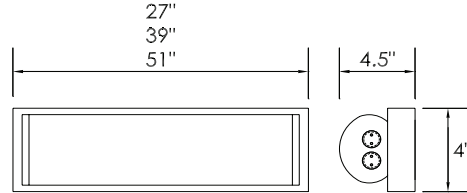

ORDERING INFORMATION

5027 - - -
Model 2. 3. 4. (if required)

2. SIZE

- 27 L: 27"
- 39 L: 39"
- 51 L: 51"

3. WATTAGE

- 27 SIZE**
- 17L 1-17W T8, elec. HPF
 - 217L 2-17W T8, elec. HPF
- 39 SIZE**
- 25L 1-25W T8, elec. HPF
 - 225L 2-25W T8, elec. HPF
- 51 SIZE**
- 32L 1-32W T8, elec. HPF
 - 232L 2-32W T8, elec. HPF

4. AVAILABLE OPTIONS

- BAC** Buy American Compliant
- BBI** Integral Battery Backup
- BBIC** Integral Battery Backup, Cold Weather (39 or 51 size only)
- CO** Convenience Outlet (120v)
- ES4** ENERGY STAR® (elec., HPF)(120v only)
- PC** Pull Chain (120 volt)

ACCESSORIES (field installed)

- BBR** Remote Battery Backup