

5080

STANDARD SPECIFICATIONS

DISCONTINUED
CHECK FACTORY STOCK

PROJECT:
MODEL #:
FIXTURE TYPE:

HOUSING

Cold rolled steel, die-formed and assembled with hardware and welds. The end caps are die-formed, and secure the diffuser to the housing with nuts.

DIFFUSER

Translucent UV stabilized white acrylic. The extruded diffuser slips into a designed track to ensure it stays in position, and the material can withstand minor impact without breaking.

ELECTRICAL

T8 Linear Fluorescent, bipin lamp (by others) - 120-277V Electronic HPF Ballast


Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH

The 5080 series housing is finished in white. The finish for this series is suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

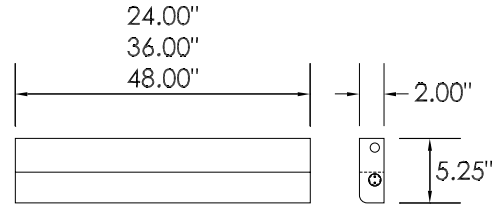

ORDERING INFORMATION

5080 - - - -
Model 2. 3. 4. (if required)

2. SIZE

24 L: 24"
36 L: 36"
48 L: 48"

3. WATTAGE

24 SIZE
17L 1-17W T8, elec. HPF
36 SIZE
25L 1-25W T8, elec. HPF
48 SIZE
32L 1-32W T8, elec. HPF

4. AVAILABLE OPTIONS

BAC Buy American Compliant
CO Convenience Outlet (120V)
PC Pull Chain: On, Off (120V)
S On/Off Switch (120V only)

ACCESSORIES (field installed)

BBR¹ Remote Battery Backup

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.