

5455 LED

STANDARD SPECIFICATIONS

HOUSING

Cold rolled steel, die-formed assembly. The housing can be mounted horizontal or vertical.

DIFFUSER

Translucent, UV stabilized white acrylic. Diffuser has oak trim finished with a natural look, secured to the diffuser with screws.

LED PERFORMANCE

120-277V - 3500K, 82 CRI - L70 rating - 54,000 hours
Source lumens noted. Amperage rated @ 110V input
Dimming compatible - 0-10V control required
Max ambient temperature - 40°C / 104°F

E37LED - 37W nominal, .31 A input - 4115 lm - 113 lm/W


MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

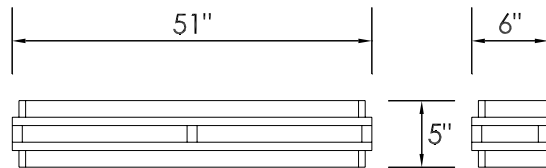

ORDERING INFORMATION

5455 - _____ - _____
Model 2. 3. (if required)

2 WATTAGE

E37LED 2-E Series boards

3. AVAILABLE OPTIONS

30K 3000K color temperature
E37LED - 4030 lm - 111 lm/W
40K 4000K color temperature
E37LED - 4199 lm - 115 lm/W
BAC Buy American Compliant
ES ENERGY STAR® listed

Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

5455




Wood and acrylic combined with a range of lamping options provides excellent flexibility in meeting specifications. Perfect for over-the-bed or vanity applications.

STANDARD SPECIFICATIONS

- HOUSING:** Steel, painted finish
DIFFUSER: White acrylic with natural oak finish
BALLAST: 120-277V HPF Electronic
LAMP:
- Linear Fluorescent (T5)
 - Linear Fluorescent (T8)

DISCONTINUED
CHECK FACTORY STOCK

PROJECT:
MODEL #:
FIXTURE TYPE:

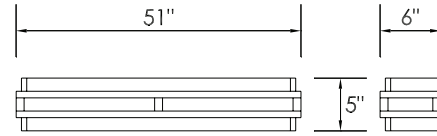

ORDERING INFORMATION

5455 - _____ - _____
Model 2. 3. (if required)

2. WATTAGE

- 28L** 1-28W T5, elec. HPF
- 228L** 2-28W T5, elec. HPF
- 328L** 3-28W T5, elec. HPF
- 32L** 1-32W T8, elec. HPF
- 232L** 2-32W T8, elec. HPF
- 332L** 3-32W T8, elec. HPF
- 54L** 1-54W T5HO, elec. HPF
- 254L** 2-54W T5HO, elec. HPF
- 354L** 3-54W T5HO, elec. HPF

3. AVAILABLE OPTIONS

- BAC** Buy American Compliant
- BBI** Integral Battery Backup (1 or 2 lamp, T8 only)
- ES4** ENERGY STAR® (elec., HPF) (1 or 2 lamp only)
- PC** Pull Chain (2 lamp, 120v only)
- SW4** 4 Position Pull Chain, 2 ballasts (2 lamp, 120v only)

ACCESSORIES (field installed)

- BBR** Remote Battery Backup (T8 only)