

SPEAR-2 [CNL]

STANDARD SPECIFICATIONS

HOUSING

This multiple light source series is constructed from cold rolled steel, and designed for a variety of wall applications.

DIFFUSER

The simple white glass cylinder is an elegant solution for any decor. The interior of the diffuser is white, with a matte finish exterior.

ELECTRICAL

GU24 LED, 2-prong Base 3000K lamp - 120V - Lifetime Rating: 25,000 hours

GU24 CFL, 2-prong Base 2700K lamp - 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

GU24 base compact fluorescent lamps used with an occupancy sensor may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included. The LED version of this fixture is designed to be mounted base down only.

FINISH

The 5672 series is finished in a sturdy brushed nickel plating, and is available in all Brownlee finishes as an option. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.


WARRANTY

The housing features a 2 year warranty against a defect in workmanship. The lamps carry a limited warranty and claims of defective products should be addressed with the lamp manufacturer.

ORDERING INFORMATION

| |
|---------------|
| PROJECT: |
| MODEL #: |
| FIXTURE TYPE: |

DISCONTINUED
CONTACT FACTORY FOR
AVAILABILITY

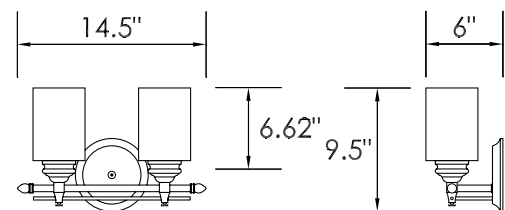

DAMP



5672 - 2. - 3. - 4. (if required)
Model

2. FINISH

STANDARD

BN Brushed Nickel

OPTIONAL

BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

G14 2-7W GU24 LED - 900 lm, 65 lm/W
G20 2-10W GU24 LED - 1600 lm, 80 lm/W

213G 2-13W GU24 CFL, elec. NPF
218G 2-18W GU24 CFL, elec. NPF

NOTE: This fixture is available with medium base socket(s) to accept screw in LED lamps by others - contact factory.

4. AVAILABLE OPTIONS

FCL⁷ French Canadian Labels

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE
LIGHTING
www.brownlee.com

REVISED
2021.06.11