

5852

DISCONTINUED

STANDARD SPECIFICATIONS

HOUSING

This multiple light source series is constructed from cold rolled steel, and designed for a variety of wall applications.

DIFFUSER

Solid white glass diffuser formed in a classic style. The exterior has a matte finish, resulting in a soft glow.

ELECTRICAL

GU24 LED, 2-prong Base 3000K lamp - 120V - Lifetime Rating: 25,000 hours

GU24 CFL, 2-prong Base 2700K lamp - 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

GU24 base compact fluorescent lamps used with an occupancy sensor may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included. The LED version of this fixture is designed to be mounted base down only.

FINISH

The 5852 series is finished in a sturdy brushed nickel plating, and is available in all Brownlee finishes as an option. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

The housing features a 2 year warranty against a defect in workmanship. The lamps carry a limited warranty and claims of defective products should be addressed with the lamp manufacturer.

ORDERING INFORMATION

5852 - _____ - _____ - _____
Model 2. 3. 4. (if required)

2. FINISH

STANDARD

BN Brushed Nickel

OPTIONAL

BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM



Provide color sample or RAL code to match

3. WATTAGE

G14 2-7W GU24 LED - 900 lm, 65 lm/W
G20 2-10W GU24 LED - 1600 lm, 80 lm/W

213G 2-13W GU24 CFL, elec. NPF
218G 2-18W GU24 CFL, elec. NPF

PROJECT:
MODEL #:
FIXTURE TYPE:

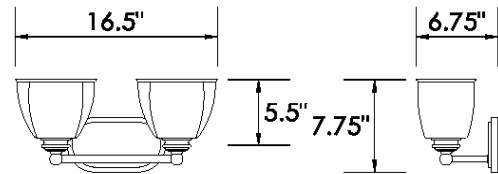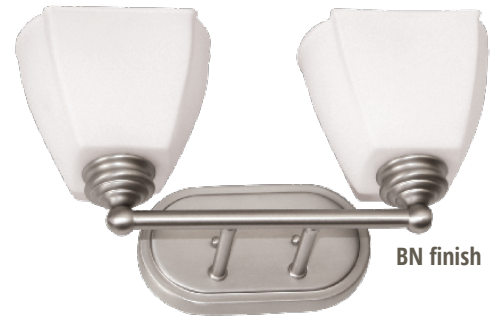

DAMP



4. AVAILABLE OPTIONS

BAC¹ Buy American Compliant
ES⁶ ENERGY STAR® (G14 only)
FCL⁷ French Canadian Labels

Notes: (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, DTR, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.