

# BAR-3 [CNL]

**DISCONTINUED**  
CONTACT FACTORY FOR  
AVAILABILITY

## STANDARD SPECIFICATIONS

### HOUSING

This multiple light source series is constructed from cold rolled steel, and designed for a variety of wall applications.

### DIFFUSER

Solid white glass diffuser formed in a classic style. The exterior has a matte finish, resulting in a soft glow.

### ELECTRICAL

GU24 LED, 2-prong Base 3000K lamp - 120V - Lifetime Rating: 25,000 hours

GU24 CFL, 2-prong Base 2700K lamp - 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

GU24 base compact fluorescent lamps used with an occupancy sensor may result in severely shortened lamp life and/or ballast damage.

### MOUNTING

Directly to j-box (by others). Mounting hardware included. The LED version of this fixture is designed to be mounted base down only.

### FINISH

The 5853 series is finished in a sturdy brushed nickel plating, and is available in all Brownlee finishes as an option. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

### WARRANTY

The housing features a 2 year warranty against a defect in workmanship. The lamps carry a limited warranty and claims of defective products should be addressed with the lamp manufacturer.

## ORDERING INFORMATION

**5853** - 2 - 3 - 4. (if required)  
Model                      2.                      3.                      4. (if required)

### 2. FINISH

#### STANDARD

**BN** Brushed Nickel

#### OPTIONAL

**BL** Black  
**BZ** Bronze  
**GM** Gun Metal  
**MB** Metallic Bronze  
**MG** Metallic Gold  
**NT** Nickel Tone  
**PL** Platinum  
**WH** White

#### CUSTOM

Provide color sample or RAL code to match

### 3. WATTAGE

**G21** 3-7W GU24 LED - 1350 lm, 65 lm/W

**G30** 3-10W GU24 LED - 2400 lm, 80 lm/W

**313G** 3-13W GU24 CFL, elec. NPF


**318G** 3-18W GU24 CFL, elec. NPF

NOTE: This fixture is available with medium base socket(s) to accept screw in LED lamps by others - contact factory.

### 4. AVAILABLE OPTIONS

**BAC<sup>1</sup>** Buy American Compliant

**FCL<sup>7</sup>** French Canadian Labels

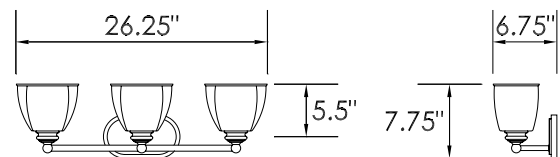

**Notes:** (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

**Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.