

7020

STANDARD SPECIFICATIONS

DISCONTINUED
CHECK FACTORY STOCK

PROJECT:
MODEL #:
FIXTURE TYPE:

HOUSING

The classic wall pack design with a die-cast housing built for the harshest installations.

REFLECTOR

Formed aluminum, secured in position with hardware.

DIFFUSER

The clear prismatic diffuser is available in both UV stabilized polycarbonate and borosilicate pressed glass.

ELECTRICAL

Triple CFL, 4-pin GX24Q Base 2700K lamp - 120-277V Electronic HPF Ballast
High Pressure Sodium, Medium Base - 120V Magnetic NPF Ballast
Metal Halide, Medium Base - Multi-tap HPF Magnetic


Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

The 7020 series is designed for direct mounting to exterior surfaces and features both rear and surface conduit entry.

FINISH

This series is available in a standard bronze polyester powder coat.

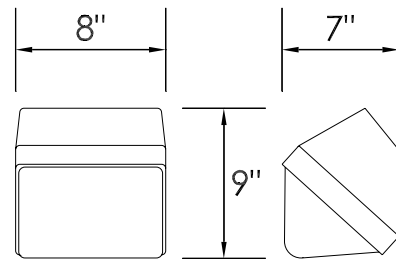

WET

ORDERING INFORMATION

7020 - _____
Model 2. 3. 4. (if required)

2. WATTAGE

- 42T** 1-42W Triple CFL, elec. HPF
- 50S** 50W HPS, 120V NPF
- 70S** 70W HPS, 120V NPF
- 50M** 50W MH, Multi-tap HPF
- 70M** 70W MH, Multi-tap HPF

3. DIFFUSER

- STANDARD**
- CPP** Clear Prismatic Polycarbonate
- OPTIONAL**
- BG** Borosilicate Molded Glass

4. AVAILABLE OPTIONS

- BAC** Buy American Compliant
- MT** Multi-Tap Ballast (S only)
- PO1** Photo Control (120V)
- PO2** Photo Control (208V, 240V, 277V)

ACCESSORIES (field installed)

- BBR¹** Remote Battery Backup (T only)
- BBRC¹** Remote Battery Backup, Cold Weather (T only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.