

# 7030 LED **DISCONTINUED**

## STANDARD SPECIFICATIONS

### HOUSING

The medium sized classic wall pack design features a rugged, die-cast aluminum housing. The hinged door is fastened over the continuous rubber seal with stainless steel hardware.

### REFLECTOR

Formed aluminum, secured in position with hardware.

### DIFFUSER

Clear, prismatic borosilicate formed glass is held into the cast door with stainless steel brackets and a sturdy, rubber gasket.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

- C17 - 16W nominal, .15 A input - 2038 lm. Dimmable (0-10V).
- C24 - 23W nominal, .20 A input - 2796 lm. Dimmable (0-10V).
- C37 - 35W nominal, .30 A input - 4149 lm. Dimmable (0-10V).
- C49 - 45W nominal, .40 A input - 5591 lm. Dimmable (0-10V).
- D30 - 30W nominal, .28 A input - 2535 lm. Non-dimming.
- D56 - 56W nominal, .80 A input - 5070 lm. Non-dimming.

### MOUNTING

The 7030 is designed to be mounted directly to a j-box (by others), or it can be mounted directly to the surface, and wired with rear conduit entry, or surface conduit into the side entry ports.

### FINISH

This series is available in a standard bronze polyester powder coat.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


### ORDERING INFORMATION

**7030** - \_\_\_\_\_  
 Model                      2.                      3.                      4. (if required)

#### 2. WATTAGE

- C17**    16W C Series LED
- C24**    23W C Series LED
- C37**    35W C Series LED
- C49**    45W C Series LED
  
- D30**    30W D Series LED
- D56**    56W D Series LED

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>

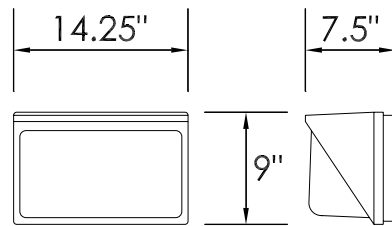

**WET**



#### 3. COLOR TEMPERATURE

- 35K**    3500K standard color temperature
- 27K**    2700K color temperature (C Series only)
- 30K**    3000K color temperature (C Series only)
- 40K**    4000K color temperature (C Series only)

#### 4. AVAILABLE OPTIONS

- BAC<sup>1</sup>**    Buy American Compliant
- BBI<sup>2\*</sup>**    Integral Battery Backup (C Series only)
- BBC**    Integral Battery Backup, Cold Weather (C Series only)
- DTR<sup>4</sup>**    Triac (Line Voltage) Dimming (120V) (C Series only)
- ECW<sup>5</sup>**    Extreme Cold Weather (-40°C / -40°F min.)
- ES<sup>6</sup>**    ENERGY STAR® (C Series only)
- FCL<sup>7</sup>**    French Canadian Labels
- PO1**    Photo Control (120V)
- PO2**    Photo Control (208, 240, 277V)
- T24<sup>9</sup>**    Title 24 Compliant (C24 in 3000K only)

**Notes:** (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

**Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

