

7502 LED

DISCONTINUED
CHECK FACTORY STOCK

STANDARD SPECIFICATIONS

SHROUD

Sturdy, 0.060" aluminum roll formed to surround the polycarbonate housing. The shroud is attached to a mounting plate secured to the wall. The shroud also has a flexible UV stabilized diffuser designed to withstand minor impact without breaking.

HOUSING

The injection molded aluminum housing is designed to withstand rugged environments. The cover plate is punched from galvanized steel.

REFLECTOR

Semi-polished aluminum, one piece die-formed material.

DIFFUSER

UV stabilized polycarbonate, injection molded in a clear 0.125" thick prismatic diffuser.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.
B12LED - 12W nominal, .10 A input - 1422 lm - 120 lm/W

MOUNTING

The housing mounts directly to a j-box (by others). Mounting hardware included. The mounting plate is installed on the wall via (4) anchors (by others), that are appropriate for the mounting surface. The shroud attaches to the plate using the included hardware.

FINISH

The 7502 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

7502 -

Model

2.

3.

4. (if required)

2. FINISH

STANDARD

AB	Antique Bronze
AS	Antique Silver
BL	Black
BT	Brass Tone
BZ	Bronze
DB	Desert Bronze
GM	Gun Metal
MB	Metallic Bronze
NT	Nickel Tone
PL	Platinum
WH	White

CUSTOM

Provide color sample or RAL code to match


3. WATTAGE

B12LED 2-B Series boards


4. AVAILABLE OPTIONS

35K	3500K standard color temperature
27K	2700K color temperature
30K	3000K color temperature
40K	4000K color temperature
BAC	Buy American Compliant
DIM	Dimming driver (120-277V) (0-10V dimming control required)
DTR	Triac (Line Voltage) Dimming (120V)
ECW	Extreme Cold Weather (-40°C / -40°F min.)
ES	ENERGY STAR®
T	Tamper Resistant Hardware and Tool

PROJECT:
MODEL #:
FIXTURE TYPE:

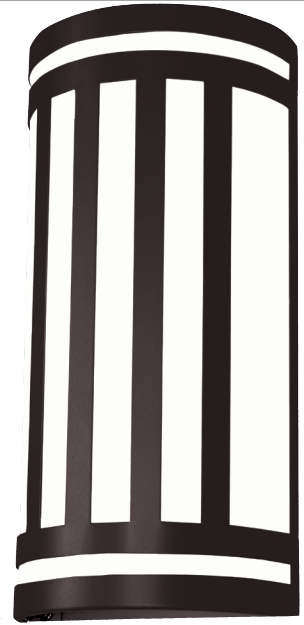

BZ finish



WET



Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

7502

DISCONTINUED
CHECK FACTORY STOCK

PROJECT:
MODEL #:
FIXTURE TYPE:

STANDARD SPECIFICATIONS

SHROUD

Sturdy, 0.060" aluminum roll formed to surround the polycarbonate housing. The shroud is attached to a mounting plate secured to the wall. The shroud also has a flexible UV stabilized diffuser designed to withstand minor impact without breaking.

HOUSING

The injection molded aluminum housing is designed to withstand rugged environments. The cover plate is punched from galvanized steel.

REFLECTOR

Semi-polished aluminum, one piece die-formed material.

DIFFUSER

UV stabilized polycarbonate, injection molded in a clear 0.125" thick prismatic diffuser.

ELECTRICAL

CFL, 2-pin GX23 Base 2700K lamp - 120V Magnetic NPF Ballast



Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

The housing mounts directly to a j-box (by others). Mounting hardware included. The mounting plate is installed on the wall via (4) anchors (by others), that are appropriate for the mounting surface. The shroud attaches to the plate using the included hardware.

FINISH

The 7502 series is available in all Brownlee paint finishes as a standard offering.

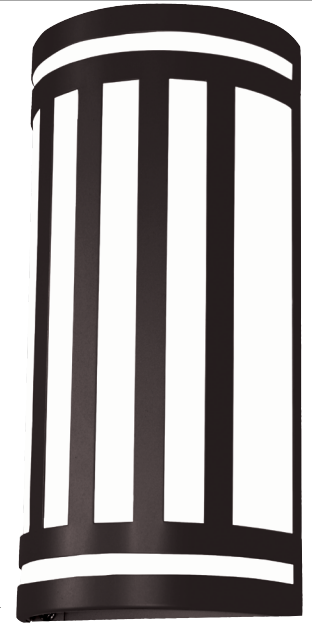

BZ finish



WET



ORDERING INFORMATION

7502 - _____ - _____ - _____
Model 2. 3. 4. (if required)

2. FINISH

STANDARD

- AB** Antique Bronze
- AC** Antique Copper
- AG** Antique Gold
- AS** Antique Silver
- BL** Black
- BR** Brick
- BT** Brass Tone
- BZ** Bronze
- DB** Desert Bronze
- DS** Desert Stone
- GM** Gun Metal
- MB** Metallic Bronze
- NT** Nickel Tone
- OL** Oak Leaf
- PL** Platinum
- RB** Rustic Bronze
- RC** Rustic Copper
- TB** Textured Black
- WH** White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

- 13** 1-13W CFL, mag.
- 213** 2-13W CFL, mag.

4. AVAILABLE OPTIONS

- BAC** Buy American Compliant
- T** Tamper Resistant Hardware and Tool

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.