

7504 LED

CUSTOM WEATHERMATE

STANDARD SPECIFICATIONS

SHROUD

Sturdy, 0.060" aluminum roll formed to surround the polycarbonate LED housing. The shroud is attached to a mounting plate secured to the wall. The shroud also has a flexible UV stabilized diffuser designed to withstand minor impact without breaking.

HOUSING

Injection molded. UV stabilized white polycarbonate housing includes a one piece, 70 durometer o-ring seal in a molded raceway around the top of the opening. The seal mates with the diffuser to provide a water resistant interior, perfectly suited for wet locations.

REFLECTOR

Semi-polished aluminum, one piece die-formed material.

DIFFUSER

UV stabilized polycarbonate, injection molded in a clear 0.125" thick prismatic diffuser.

LED PERFORMANCE

120-277V - 3500K, 82 CRI - L70 rating - 54,000 hours
Source lumens noted. Amperage rated @ 110V input
Max ambient temperature - 40°C / 104°F

B6LED - 6W nominal, .05 A input - 643 lm - 105 lm/W

B12LED - 12W nominal, .10 A input - 1303 lm - 108 lm/W

C9LED - 9W nominal, .10 A input - 1009 lm - 121 lm/W

C24LED - 24W nominal, .20 A input - 2438 lm - 100 lm/W

MOUNTING

The LED housing mounts directly to a j-box (by others). Mounting hardware included. The mounting plate is installed on the wall via (4) anchors (by others), that are appropriate for the mounting surface. The shroud attaches to the plate using the included hardware.

FINISH

The 7504 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

7504 - _____ - _____ - _____
Model 2. 3. 4. (if required)

2. FINISH

STANDARD

AG	Antique Gold
BL	Black
BR	Brick
BZ	Bronze
CN	Chestnut
DS	Desert Stone
GD	Gold Dust
GM	Gun Metal
MB	Metallic Bronze
NT	Nickel Tone
OL	Oak Leaf
PL	Platinum
RB	Rustic Bronze
RC	Rustic Copper
WH	White

CUSTOM


Provide color sample or RAL code to match

3. WATTAGE

B6LED	1-B Series board
B12LED	2-B Series boards
C9LED	1-C Series board
C24LED	2-C Series boards

4. AVAILABLE OPTIONS

27K	2700K color temperature B6LED - 567 lm - 92 lm/W B12LED - 1138 lm - 95 lm/W C9LED - 900 lm - 108 lm/W C24LED - 2062 lm - 84 lm/W
30K	3000K color temperature B6LED - 592 lm - 96 lm/W B12LED - 1174 lm - 98 lm/W C9LED - 977 lm - 117 lm/W C24LED - 2351 lm - 96 lm/W
40K	4000K color temperature B6LED - 635 lm - 103 lm/W B12LED - 1275 lm - 106 lm/W C9LED - 1010 lm - 121 lm/W C24LED - 2482 lm - 101 lm/W
BAC	Buy American Compliant
DIM	Dimming driver (120-277V)(All except B6LED) (0-10V dimming control required)
ES	ENERGY STAR®(All except B6LED)
T	Tamper Resistant Hardware and Tool

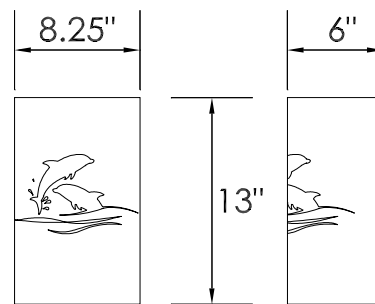

WET

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE
LIGHTING
www.brownlee.com

DISCONTINUED
2015.2.16

7504




Weathermate™ series sconce has a laser-cut design of dolphins or a snowboarder that can easily be customized with other symbols or company logos..

STANDARD SPECIFICATIONS

- SHROUD:** Frame is .063 aluminum (specify painted finish) and lens is white UV stabilized acrylic. Shroud and back plate are installed separately from inner housing with four anchors (by others)
- HOUSING:** Polycarbonate, white finish
- DIFFUSER:** Clear prismatic polycarbonate
- BALLAST:** • 120V NPF Magnetic
• 120V NPF Electronic
- LAMP:** • CFL, 2-pin GX23 Base 2700K
• Quad CFL, 4-pin G24Q Base 2700K

PROJECT:
MODEL #:
FIXTURE TYPE:



DISCONTINUED

CHECK FACTORY STOCK

ORDERING INFORMATION

7504 - - -
Model 2. 3. 4. (if required)

2. SHROUD FINISH

STANDARD

- AG** Antique Gold
BL Black
BR Brick
BZ Bronze
CN Chestnut
DS Desert Stone
GD Gold Dust
GM Gun Metal
MB Metallic Bronze
NT Nickel Tone
OL Oak Leaf
PL Platinum
RB Rustic Bronze
RC Rustic Copper
WH White

CUSTOM

Provide color sample
or RAL code to match

3. WATTAGE

- 13** 1-13W CFL, mag.
213 2-13W CFL, mag.

13Q 1-13W Quad CFL, elec. NPF
213Q 2-13W Quad CFL, elec. NPF
18Q 1-18W Quad CFL, elec. NPF
218Q 2-18W Quad CFL, elec. NPF
26Q 1-26W Quad CFL, elec. NPF

4. OPTIONS & ACCESSORIES

- BAC** Buy American Compliant
ES3 ENERGY STAR® (elec., NPF) (Q only)
ES4 ENERGY STAR® (elec., HPF) (Q only)
T Tamper Resistant Hardware and Tool
UNV 120-277V (50/60 Hz), elec. HPF (Q only)

ACCESSORIES (field installed)

- BBR** Remote Battery Backup (Q only)
BBRC Remote Battery Backup, Cold Weather (Q only)

Note: BBI and BBR options have an operating temperature of +32°F to +122°F. Cold weather options BBIC and BBRC have an operating temperature of -4°F to +131°F.