

AXIAL SERIES **DISCONTINUED**

STANDARD SPECIFICATIONS

TRIM

UV stabilized polycarbonate, injection molded one piece trim, with uniform 0.125" thickness. The color is molded throughout and the stainless steel hardware is captured in place.

DIFFUSER

UV stabilized polycarbonate, injection molded in a frosted 0.125" thick prismatic diffuser.

HOUSING

Die-cast, one piece marine grade aluminum available in two depths. 6.5" deep housing has threaded conduit plugs on four sides.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 284 lm. Non-dimming.

B12 - 12W nominal, .10 A input - 562 lm. Dimmable (0-10V).

C09 - 9W nominal, .10 A input - 396 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 812 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 1113 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included. The 6.5" deep version can be anchored to the surface for conduit entry.

FINISH

Brownlee offers four standard finishes.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



BL finish

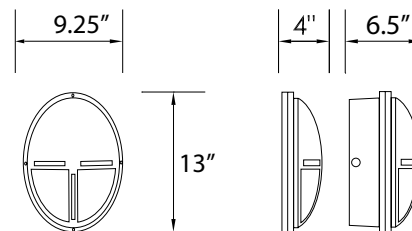

WET



ORDERING INFORMATION

7714 - _____
 Model 2. 3. 4. 5. 6. (if required)

2. SIZE

- 4 4" depth
- 6 6.5" depth*

*6.5" depth does not meet ADA requirements.

3. FINISH

- BL Black
- BZ Bronze
- TI Titanium
- WH White

4. WATTAGE

4 SIZE

- B06 6W B Series LED
- B12 12W B Series LED

- C09 9W C Series LED
- C17 16W C Series LED
- C24 23W C Series LED

6 SIZE

- B06 6W B Series LED
- B12 12W B Series LED

- C09 9W C Series LED
- C17 16W C Series LED
- C24 23W C Series LED

5. COLOR TEMPERATURE

- 35K 3500K standard color temperature
- 27K 2700K color temperature
- 30K 3000K color temperature
- 40K 4000K color temperature

6. AVAILABLE OPTIONS

- BAC¹ Buy American Compliant
- BBI^{2*} Integral Battery Backup (B06, B12 & C09 only, 6 size only)
- BLD^{3**} Bi-Level Dimming (All except B06)
- DTR⁴ Triac (Line Voltage) Dimming (120V) (All except B06 & C17)
- ECW⁵ Extreme Cold Weather (-40°C / -40°F min.)
- ES⁶ ENERGY STAR®
- FCL⁷ French Canadian Labels
- OCC⁸ Occupancy Sensor
- PO1 Photo Control (120V) (6 size only)
- PO2 Photo Control (208, 240, 277V) (6 size only)
- TMP Tamper Resistant Hardware and Tool
- T24⁹ Title 24 Compliant (B12 & C24 in 3000K only)

Notes: (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

