

# 79300 LED

**DISCONTINUED**  
REFER TO MODEL #: 7171 FOR  
COMPARABLE OUTDOOR CANOPY

## STANDARD SPECIFICATIONS

### HOUSING

Heavy duty die-cast aluminum construction. The housing features an o-ring seal that seats on the edge of the opening against the diffuser to prevent water intrusion. IP65 Rated.

### DIFFUSER

Sturdy, clear prismatic polycarbonate diffuser designed to maximize delivered performance. Widespread distribution intended for parking garages, breezeways, etc.

### LED PERFORMANCE

120-277V - 4000K, 82 CRI - L70 rating - 76,000 hrs (projected)  
Operating ambient temperature: -25°C / -13°F - 40°C / 104°F  
Refer to Wattage section for lumen output.

### MOUNTING

The 73900 is designed to be mounted directly to a j-box (by others) using the included mounting plate, or directly to the surface using pre-drilled anchor points in the cast housing. A threaded hole on the rear can be utilized for pendant-mounting to a 3/4" electrical conduit pipe (by others). Additional knockout ports are available for surface conduit entry on each of the four sides.

### FINISH

This series is available in a standard bronze polyester powder coat. Select Brownlee paint finishes are also available as an option.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:
MODEL #:
FIXTURE TYPE:



BZ finish



BZ finish

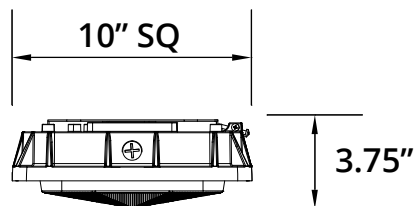

## ORDERING INFORMATION

**79300** -          -          -          -          -           
Model                      2.                      3.                      4.                      5.

### 2. SIZE

**10**    10" sq.

Note: the 14" sq. size has been discontinued. Contact factory for further assistance. Refer to model #: 7171 LED for an alternative product.

### 3. FINISH

**STANDARD**  
**BZ**    Bronze

### OPTIONAL

**BL**    Black  
**GM**    Gun Metal  
**NT**    Nickel Tone  
**PL**    Platinum  
**WH**    White

### CUSTOM

Provide color sample or RAL code to match

### 4. WATTAGE

**P45LED**    45W P Series LED, .45 A input,  
4368 delivered lumens  
Replaces up to 70W MH\*

\*Based on luminaire lumen output

### 5. CCT

**40K**    4000K

## FIELD INSTALLED ACCESSORIES (order separately)

ORDERING NUMBER	DESCRIPTION	NOTES
910037	Photocell (120-277V)	Universal voltage photocell. Field installed (by others).

**Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.

