



### 1250 LED

At just 1.25" dia., TRACE incorporates Brownlee's slimmest luminaire profile to date. Intended for bathroom vanity applications, hallways, lobbies, and more. Subtle aesthetic, big performance, high quality construction. TRACE MINI features an offset mounting position offered in the 1' size only. Refer to Model #: 5200 for three center-mount sizes (1', 2', 3').

### FINISHES



# TRACE MINI

## STANDARD SPECIFICATIONS

### FIXTURE ASSEMBLY

Ultra compact 1.25" dia. profile. Assembly is comprised of an aluminum extrusion with die-cast aluminum end caps and a spun aluminum canopy. No visible hardware other than a single set-screw on the canopy, strategically located behind extruded profile. High-quality extruded frosted acrylic diffuser. UV stabilized.

### LED PERFORMANCE

3500K standard, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F  
Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

### 13" Size

H09: 9W nominal, 0.08A input - 840 lm. Dimmable (0-10V). 120-277V.

### MOUNTING

Fixture mounts to a 4" x 1.5" deep\* octagonal j-box (not included - by others).

\*Driver stored in j-box as a standard offering. 1.5" minimum depth j-box required.

Refer to Options section for Extended Canopy (EXT) if driver cannot be mounted in j-box.

Fixture assembly ships pre-assembled for simplified installation. Indoors only.

### FINISH


Electroplated brushed nickel is the standard finish.

Optional finishes available (non-returnable).

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

Refer to Model #: 5200 for three center-mount sizes  
(1', 2', 3'). Pictured below.

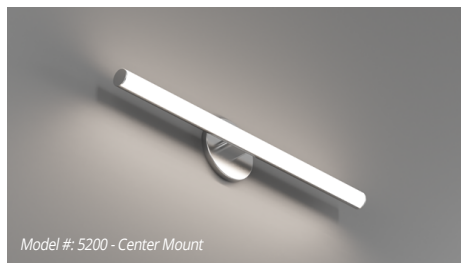


Model #: 5200 - Center Mount

PROJECT:

MODEL #:

FIXTURE TYPE:

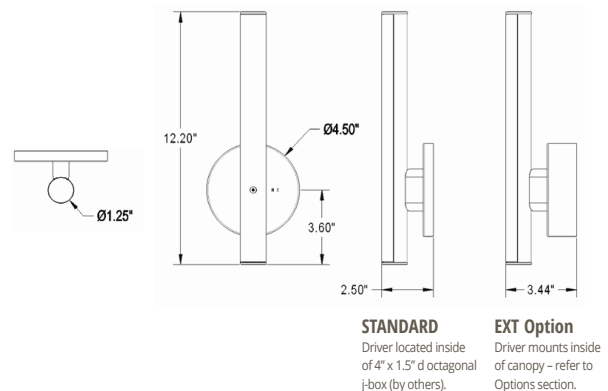

DAMP



RoHS  
COMPLIANT  
ELECTRONICS

## ORDERING INFORMATION

1250

Model

2.

3.

4.

5. (if required)

### 2. FINISH

#### STANDARD

BN Brushed Nickel

#### OPTIONAL

BL Black  
BZ Bronze  
MG Metallic Gold  
WH White

Note: Optional finishes are non-returnable.

### 3. WATTAGE

#### 13 SIZE

H09 9W H Series LED

### 4. COLOR TEMPERATURE

35K 3500K standard color temperature  
30K 3000K color temperature  
40K 4000K color temperature

Note: 27K available, contact factory, non-returnable.

### 5. AVAILABLE OPTIONS

EXT Extended Canopy (Driver In Canopy)  
Canopy dimensions: 4.5" dia. x 1.5" d  
Total fixture depth: 3.5" d

DTR<sup>4</sup> Triac (Line Voltage) Dimming (120V)  
FCL<sup>7</sup> French Canadian Labels

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes J48 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

\*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.



BROWNLEE  
LIGHTING

www.brownlee.com

REVISED  
2024.12.23