

AVENUE

STANDARD SPECIFICATIONS

FRAME

The injection molded styrene compound is noted for its durability and strength. The frame walls are 0.080" thick, and the color is uniform throughout.

DIFFUSER

Translucent, UV stabilized white acrylic, injection molded to the shape of its frame. The diffuser is installed in the frame with hardware.

PAN

Formed aluminum design, finished in a powder coat high reflectance white paint.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 427 lm. Non-dimming.

B12 - 12W nominal, .10 A input - 844 lm. Dimmable (0-10V).

C09 - 9W nominal, .10 A input - 595 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 1220 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 1674 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 1375 series is available in standard molded nickel tone or bronze. Optional finishes include all Brownlee paints.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

PROJECT:

MODEL #:


FIXTURE TYPE:



MB finish



NT finish

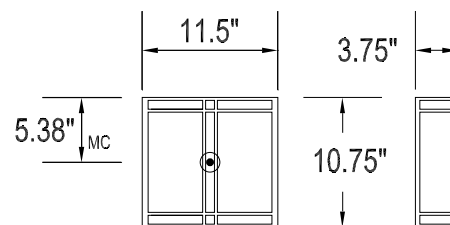

DAMP



1375

Model

2.

3.

4.

5. (if required)

2. FINISH

STANDARD
NT Nickel Tone

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
WH White

CUSTOM
Provide color sample or RAL code to match

3. WATTAGE

B06 6W B Series LED
B12 12W B Series LED

C09 9W C Series LED
C17 16W C Series LED
C24 23W C Series LED

4. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

5. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant (BAA)
DTR⁴ Triac (Line Voltage) Dimming (120V) (All except B06)
FCL⁷ French Canadian Labels
T24⁹ Title 24 JA8 Compliant (B12 & C24 in 3000K only)

Universal Footnotes (only applies if superscript is shown in Options section): (0) **90R** - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) **BAC/BAB** - www.brownlee.com/resources/usa. (2) **BBI/BBC** - cannot combine with ECW or EXT. (3) **BLD** - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) **DTR** - cannot combine with BLD. (5) **ECW** - cannot combine with BBI, BBC, or DTR. (7) **FCL** - cannot combine with BAC. (8) **OCC** - integral microwave motion sensor (ON/OFF). (9) **T24** - includes JA8 labeling and 90 CRI LEDs. (10) **PCH/PC4** - cannot combine with BLD or OCC.

Add'l Notes: ***BBI/BBC** - BBI minimum operating temp: 10C/50F unless otherwise stated. **BBC** minimum operating temp: -20C/-4F.

****BLD** - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.



BROWNLEE
LIGHTING

www.brownlee.com

REVISED
2024.12.18