

# DELTA

## STANDARD SPECIFICATIONS

### HOUSING

Cold rolled steel, die-formed and assembled with hardware and welds. The end caps are die-formed, and secure the diffuser to the housing with nuts.

### DIFFUSER

Translucent UV stabilized white acrylic. The extruded diffuser slips into a designed track to ensure it stays in position, and the material can withstand minor impact without breaking.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H16 - 16W nominal, .14 A input - 1754 lm. Dimmable (0-10V).

H25 - 25W nominal, .20 A input - 2590 lm. Dimmable (0-10V).

H32 - 32W nominal, .26 A input - 3612 lm. Dimmable (0-10V).

### MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

### FINISH

The 5010 series housing is finished in white, and the end caps are available in either white or polished chrome. The finish for this series is suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>



CH endcaps

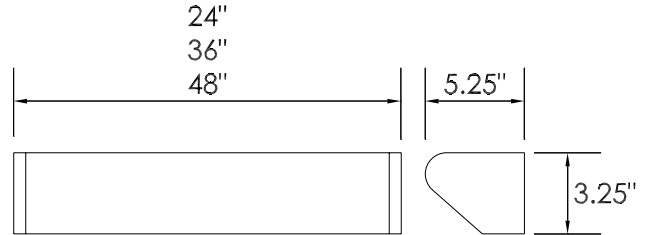

## ORDERING INFORMATION



**5010** - \_\_\_\_\_  
 Model                      2.                      3.                      4.                      5.                      6. (if required)

### 2. SIZE

- 24** L: 24"
- 36** L: 36"
- 48** L: 48"

### 3. ENDCAPS

- CH** Chrome
- WH** White

### 4. WATTAGE

- 24 SIZE**
- H16** 16W H Series LED
- 36 SIZE**
- H25** 25W H Series LED
- 48 SIZE**
- H32** 32W H Series LED

### 5. COLOR TEMPERATURE

- 35K** 3500K standard color temperature
- 30K** 3000K color temperature
- 40K** 4000K color temperature

### 6. AVAILABLE OPTIONS

- BAC<sup>1</sup>** Buy American Compliant
- BBI<sup>2\*</sup>** Integral Battery Backup (8W) (H25 & H32 only)  
*Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.*
- DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)
- ES<sup>6</sup>** ENERGY STAR® (Not available in 90 CRI)
- FCL<sup>7</sup>** French Canadian Labels
- PCH<sup>10</sup>** Pull Chain: On, Off (120V)
- T24<sup>9</sup>** Title 24 JA8 Compliant

**Universal Footnotes (only applies if option is listed on spec sheet):** (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. \*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

