

# DELTA

## STANDARD SPECIFICATIONS

### HOUSING

Cold rolled steel, die-formed and assembled with hardware and welds. The end caps are die-formed, and secure the diffuser to the housing with nuts.

### DIFFUSER

Translucent UV stabilized white acrylic. The extruded diffuser slips into a designed track to ensure it stays in position, and the material can withstand minor impact without breaking.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.  
H16 - 16W nominal, .14 A input - 1754 lm. Dimmable (0-10V).  
H25 - 25W nominal, .20 A input - 2590 lm. Dimmable (0-10V).  
H32 - 32W nominal, .26 A input - 3612 lm. Dimmable (0-10V).

### MOUNTING


Fixture uses wall anchors (by others) appropriate for the mounting surface.

### FINISH

The 5010 series housing is finished in white, and the end caps are available in either white or polished chrome. The finish for this series is suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

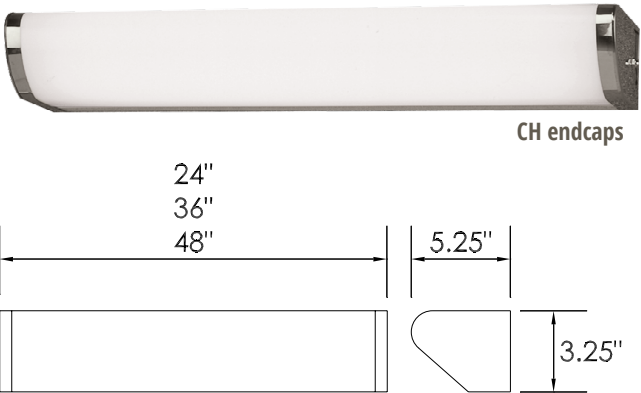

DAMP



RoHS  
COMPLIANT  
ELECTRONICS



## ORDERING INFORMATION

5010 - 2. - 3. - 4. - 5. - 6. (if required)

2. SIZE	3. ENDCAPS	4. WATTAGE	5. COLOR TEMPERATURE
24 L: 24"	CH Chrome	24 SIZE	35K 3500K standard color temperature
36 L: 36"	WH White	H16 16W H Series LED	30K 3000K color temperature
48 L: 48"		36 SIZE	40K 4000K color temperature
		H25 25W H Series LED	
		48 SIZE	
		H32 32W H Series LED	

6. AVAILABLE OPTIONS
BAB <sup>1</sup> Build America, Buy America Compliant (BABAA) (Exclusions: BBI, DTR - contact factory)
BAC <sup>1</sup> Buy American Compliant (BAA)
BBI <sup>2*</sup> Integral Battery Backup (8W) (H25 & H32 only) <i>Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.</i>
DTR <sup>4</sup> Triac (Line Voltage) Dimming (120V)
FCL <sup>7</sup> French Canadian Labels
PCH <sup>10</sup> Pull Chain: On, Off (120V)
T24 <sup>9</sup> Title 24 JA8 Compliant

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

\*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.



BROWNLEE  
LIGHTING

www.brownlee.com

REVISED  
2024.12.20