# FLOW-RD MINI

PROJECT:

MODEL #:

FIXTURE TYPE:

## STANDARD SPECIFICATIONS

### HOUSING
Assembly is comprised of an aluminum extrusion with a cold rolled steel housing and your choice of decorative bottom end cap, which is plated and coated.

### DIFFUSER
Ultra slim 2.0" diameter UV stabilized white acrylic. Diffuser is specifically designed to maximize light output with minimal energy consumption. Extruded in the USA. Recessed top cover included as standard. For a square profile, refer to Model #: 1265.

### LED PERFORMANCE
3500K standard, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F
Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
H08 - 8W nominal, .07 A input - 766 lm. Dimmable (0-10V). 120-277V.
H10 - 10W nominal, .08 A input - 920 lm. Dimmable (Triac). 120V Only.

### MOUNTING
Fixture mounts directly to a 2x4 j-box (by others). Diffuser and housing assembly ship preassembled for simplified installation. Optional cover plate available if mounting to a 4x4 junction box - refer to accessories.

### FINISH
The 1260 series is finished in brushed nickel as a standard. It is available in all Brownlee paint finishes as an optional offering. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

### WARRANTY
5 year limited warranty on this LED product. Consult factory for details.

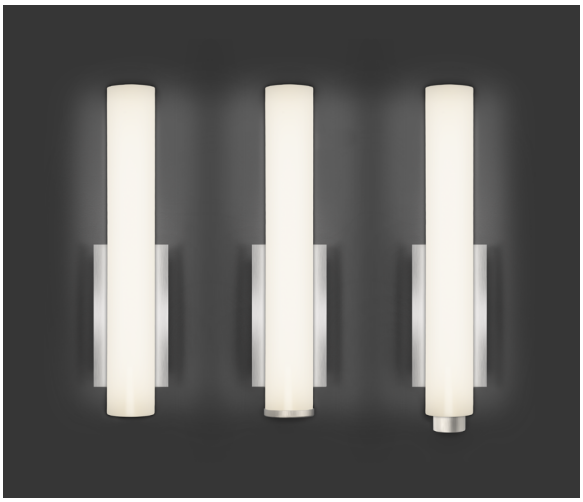

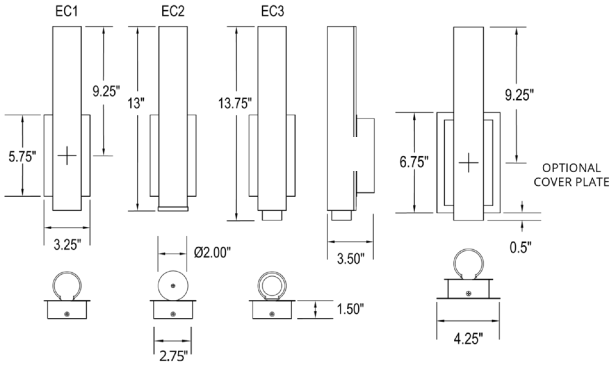


FLOW Family - refer to model #: 5160 (pictured below) for alternate sizes.

DAMP

ADA

## ORDERING INFORMATION

1260 - _____ - _____ - _____ - _____ - _____

Model | 2. | 3. | 4. | 5. | 6. (if required)

### 2. FINISH

**STANDARD**
**BN** Brushed Nickel

**OPTIONAL**
**BL** Black
**BZ** Bronze
**GM** Gun Metal
**MB** Metallic Bronze
**MG** Metallic Gold
**NT** Nickel Tone
**PL** Platinum
**WH** White

**CUSTOM**
Provide color sample or RAL code to match

### 3. WATTAGE

**H08** 8W H Series LED
**H10** 10W H Series LED

### 4. END CAP

**EC1** End Cap 1
**EC2** End Cap 2
**EC3** End Cap 3

### 5. COLOR TEMPERATURE

**35K** 3500K standard color temperature
**30K** 3000K color temperature
**40K** 4000K color temperature

### 6. AVAILABLE OPTIONS

**90R[0]** 90 CRI (3000K only)
**BAC[1]** Buy American Compliant
**FCL[7]** French Canadian Labels

### ACCESSORIES (field installed - order separately)

**100043BN** Cover Plate - Brushed Nickel (Covers 4x4 jbox)
**100043xx** Cover Plate - Specify Finish (xx) (Covers 4x4 jbox)

**Notes: (0) 90R** - cannot be combined with ES. **1) BAC** - cannot be combined with FCL. **(2) BBI/BBS/BBC**- cannot be combined with ECW, EXT, or T24. **(3) BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. **(4) DTR** - cannot be combined with BLD or T24. **(5) ECW** - cannot be combined with BBI, BBC, or DTR. **(6) ES** - cannot be combined with 90R or T24. **(7) FCL** - cannot be combined with BAC or T24. **(8) OCC** - integral ON/OFF occupancy sensor. **(9) T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. **(10) BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. **(11) PCH/PC4** - cannot be combined with BLD or OCC.
**Add'l Notes: *BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

**Specifications and dimensions subject to change without notice.**
Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE LIGHTING
www.brownlee.com

REVISED
2020.12.28