

FLOW-RD MINI

STANDARD SPECIFICATIONS

HOUSING

Assembly is comprised of an aluminum extrusion with a cold rolled steel housing and your choice of decorative bottom end cap, which is plated and coated.

DIFFUSER

Ultra slim 2.0" diameter UV stabilized white acrylic. Diffuser is specifically designed to maximize light output with minimal energy consumption. Extruded in the USA. Regressed top diffuser cover included as standard. For a square profile, refer to Model #: 1265.

LED PERFORMANCE

3500K standard, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F
 Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
 H08 - 8W nominal, .07 A input - 766 lm. Dimmable (0-10V), 120-277V.
 H10 - 10W nominal, .08 A input - 920 lm. Dimmable (Triac), 120V Only.

MOUNTING

Fixture mounts directly to a vertically positioned 2x4 j-box (by others). Diffuser and housing assembly ship preassembled for simplified installation. Optional cover plate available if mounting to a 4x4 junction box - refer to accessories. Indoors only.

FINISH

The 1260 series is finished in brushed nickel as a standard. It is available in all Brownlee paint finishes as an optional offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

FLOW Family - refer to model #: 5160 (pictured below) for alternate sizes.



PROJECT:
MODEL #:
FIXTURE TYPE:

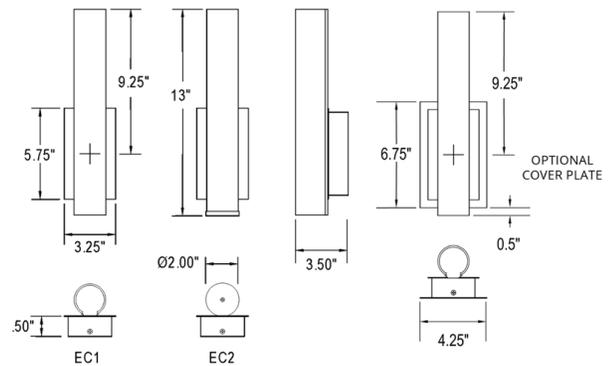

ORDERING INFORMATION

1260 - - - - - -
 Model 2. 3. 4. 5. 6. (if required)

2. FINISH	3. WATTAGE	4. END CAP	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS
STANDARD BN Brushed Nickel	H08 8W H Series LED H10 10W H Series LED	EC1 End Cap 1 EC2 End Cap 2 *NOTE: EC3 has been discontinued. Contact factory for availability.	35K 3500K standard color temperature 30K 3000K color temperature 40K 4000K color temperature	BAC¹ Buy American Compliant FCL⁷ French Canadian Labels
OPTIONAL BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White				

ACCESSORIES (field installed - order separately)

100043BN Cover Plate - 6.75" l x 4.25" w - Brushed Nickel (Covers 4x4 jbox)
100043xx Cover Plate - 6.75" l x 4.25" w - Specify Finish (xx) (Covers 4x4 jbox)

*Note: This accessory plate mounts to a 4x4 box via universal crossbar (by others). If mounting this plate to a 2x4 switch box, the direction of the plate must follow the direction of the 2x4 box lengthwise (i.e. box, plate, and fixture must all be vertically positioned).

CUSTOM
Provide color sample or RAL code to match

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JAB labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**
 Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2023.11.02