

# FLOAT

## STANDARD SPECIFICATIONS

### TRIM

Cold rolled 20 GA, formed with spinning and die punch tooling. The assembly also features threaded studs and is assembled with hardware. The stem and canopy are both cold rolled steel.

### DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a decorative recess.

### PAN

Cold rolled 20 GA steel, formed with die punch tooling.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.  
 B12 - 12W nominal, .10 A input - 1225 lm. Dimmable (0-10V).  
 C17 - 16W nominal, .15 A input - 1770 lm. Dimmable (0-10V).  
 C24 - 23W nominal, .20 A input - 2429 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

## ORDERING INFORMATION

**2058** - - - - -  
 Model                      2.                      3.                      4.                      5.

### 2. FINISH

**STANDARD**  
**BN**      Brushed Nickel

**OPTIONAL**  
**BL**      Black  
**BZ**      Bronze  
**GM**      Gun Metal  
**MB**      Metallic Bronze  
**MG**      Metallic Gold  
**NT**      Nickel Tone  
**PL**      Platinum  
**WH**      White

**CUSTOM**  
 Provide color sample or  
 RAL code to match

### 3. WATTAGE

**B12**      12W B Series LED  
**C17**      16W C Series LED  
**C24**      23W C Series LED


### 4. COLOR TEMPERATURE

**35K**      3500K standard color temperature  
**27K**      2700K color temperature  
**30K**      3000K color temperature  
**40K**      4000K color temperature

### 5. AVAILABLE OPTIONS

**90R<sup>0</sup>**      90 CRI (3000K only)  
**BAC<sup>1</sup>**      Buy American Compliant  
**BLD<sup>3\*\*</sup>**      Bi-Level Dimming  
**DTR<sup>4</sup>**      Triac (Line Voltage) Dimming (120V)  
**ES<sup>6</sup>**      ENERGY STAR® (Not available in 90 CRI)  
**FCL<sup>7</sup>**      French Canadian Labels  
**OCC<sup>8</sup>**      Occupancy Sensor  
**T24<sup>9</sup>**      Title 24 JA8 Compliant (B12 & C24 in 3000K only)

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>

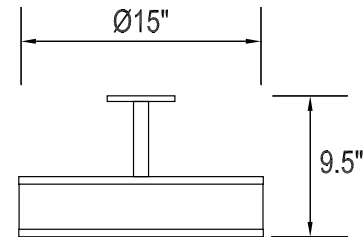

**Universal Footnotes (only applies if option is listed on spec sheet):** (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. \*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**  
 Consult your Brownlee Lighting representative for availability and ordering information.