

FLOAT

STANDARD SPECIFICATIONS

TRIM

Cold rolled 20 GA, formed with spinning and die punch tooling. The assembly also features threaded studs and is assembled with hardware.

DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a decorative recess.

PAN

Cold rolled 20 GA steel, formed with die punch tooling.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1225 lm. Dimmable (0-10V).
 C17 - 16W nominal, .15 A input - 1770 lm. Dimmable (0-10V).
 C24 - 23W nominal, .20 A input - 2429 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION


2060 - _____
 Model 2. 3. 4. 5.

2. FINISH	3. WATTAGE	4. COLOR TEMPERATURE	5. AVAILABLE OPTIONS
STANDARD BN Brushed Nickel	B12 12W B Series LED C17 16W C Series LED C24 23W C Series LED	35K 3500K standard color temperature 27K 2700K color temperature 30K 3000K color temperature 40K 4000K color temperature	90R⁰ 90 CRI (3000K only) BAC¹ Buy American Compliant BBI^{2*} Integral Battery Backup BLD^{3**} Bi-Level Dimming DTR⁴ Triac (Line Voltage) Dimming (120V) ES⁶ ENERGY STAR® (Not available in 90 CRI) FCL⁷ French Canadian Labels OCC⁸ Occupancy Sensor T24⁹ Title 24 JA8 Compliant (B12 & C24 in 3000K only)
OPTIONAL BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White			
CUSTOM Provide color sample or RAL code to match			

PROJECT:
MODEL #:
FIXTURE TYPE:



BN finish, WHA

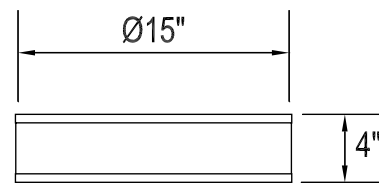

DAMP



Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remains in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.