



Black Finish (Optional) | FL1 diffuser

RD2 diffuser + Extended Housing (EXT) option,  
also used for Integral Battery Backup (BBI).

## 2061 LED

The modern SPIN features high efficacy performance and is perfect for corridors, units and plenty of other general lighting applications. Tool-free twist-lock diffuser design with two styles to choose from and no exposed hardware. Refer to the 2081 for a similar look offered in larger sizes.

### NEW

- 18" dia. size now available.
- Integral Battery Backup now available (both sizes).
- Extended Housing (EXT) now standard on Battery Backup option and Occupancy Sensor + Bi-level Dimming options.

### CUSTOMIZE



# SPIN

## STANDARD SPECIFICATIONS

### HOUSING

Sturdy cold rolled steel formed spinning. No exposed hardware on spinning wall.

### DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a secure tool-free "twist-lock" installation method.

### MOUNTING

Directly to j-box (by others). Mounting hardware included. Indoors only.  
Extended housing option (EXT) may be used for side-fed conduit entry but must be drilled in the field and is thus non-returnable.

### FINISH

The standard finish is a plated brushed nickel. Options include all Brownlee finishes.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F  
Uses RoHS compliant electrical components. Delivered 3500K lumens noted.

14 Size: R11 - 11W nominal, .09 A input - 1094 lm. Dimmable (0-10V).

14 Size: R18 - 18W nominal, .15 A input - 1749 lm. Dimmable (0-10V).

14 Size: R22 - 22W nominal, .19 A input - 2061 lm. Dimmable (0-10V).

18 Size: R23 - 23W nominal, .19 A input - 2105 lm. Dimmable (0-10V).

18 Size: R34 - 34W nominal, .28 A input - 3100 lm. Dimmable (0-10V).

18 Size: R49 - 49W nominal, .41 A input - 4115 lm. Dimmable (0-10V).


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:

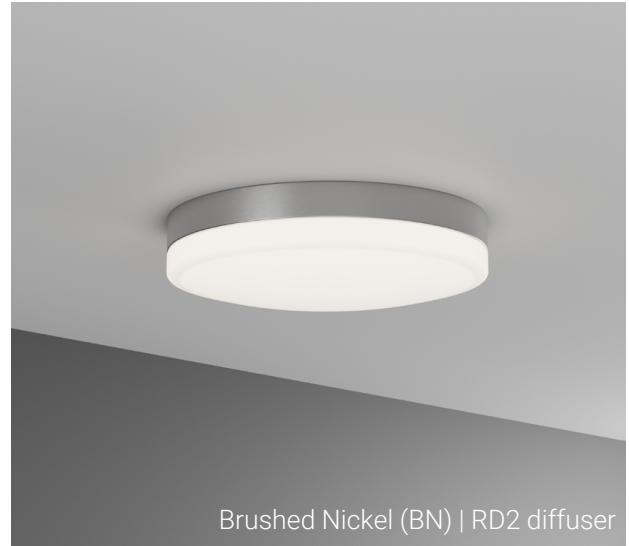

Brushed Nickel (BN) | RD2 diffuser

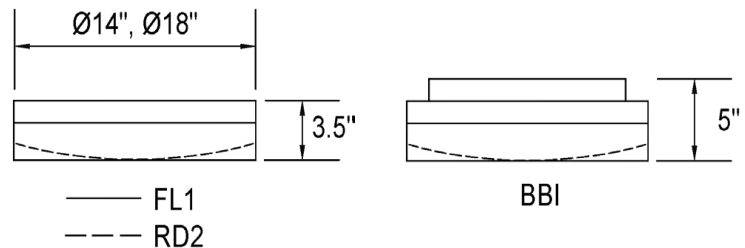

DAMP



RoHS  
COMPLIANT  
ELECTRONICS



## ORDERING INFORMATION

2061 - - - - - - - - - -						
Model	2.	3.	4.	5.	6.	7. (if required)
<b>2. SIZE</b>						
14	14" dia.					
18	18" dia.					
<b>3. FINISH</b>						
<b>STANDARD</b>						
BN	Brushed Nickel					
<b>OPTIONAL</b>						
BL	Black					
BZ	Bronze					
BU	Pastel Blue (RAL 5024)					
GN	Pastel Green (RAL 6019)					
MG	Metallic Gold					
NT	Nickel Tone					
RD	Red (RAL 3020)					
WH	White					
YL	Yellow (RAL 1018)					
<b>4. WATTAGE</b>						
<b>14 SIZE</b>						
R11	11W R Series LED					
R18	18W R Series LED					
R22	22W R Series LED					
<b>18 SIZE</b>						
R23	23W R Series LED					
R34	34W R Series LED					
R49	49W R Series LED					
<b>5. DIFFUSER</b>						
FL1	Style 1 Flat Diffuser					
RD2	Style 2 Round Diffuser					
*Note: RD1 has been discontinued.						
<b>6. COLOR TEMPERATURE</b>						
35K	3500K standard color temp.					
27K	2700K color temp.					
30K	3000K color temp.					
40K	4000K color temp.					
<b>7. AVAILABLE OPTIONS</b>						
90R <sup>9</sup>	90 CRI (30K & 35K only)					
BAC <sup>1</sup>	Buy American Compliant (BAA)					
BBI <sup>2*</sup>	Integral Battery Backup (8W) (Requires extended housing) (Adds 1.50" to depth) <i>Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.</i>					
BLD <sup>3**</sup>	Bi-Level Dimming (Requires extended housing) (Adds 1.50" to depth)					
DTR <sup>4</sup>	Triac (Line Voltage) Dimming (120V)					
EXT	Extended Housing (Intended to match BBI extension) (Adds 1.50" to depth). Contact factory if using for conduit entry.					
FCL <sup>7</sup>	French Canadian Labels					
OCC <sup>8</sup>	Occupancy Sensor (Requires extended housing) (Adds 1.50" to depth)					
T24 <sup>9</sup>	Title 24 JA8 Compliant (30K & 35K only)					

**Universal Footnotes (only applies if superscript is shown in Options section):** (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

**Add'l Notes:** \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

\*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

**Specifications subject to change without notice.**