

SHADER DEEP

STANDARD SPECIFICATIONS

SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

TRIM

Cold rolled steel stem and canopy. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee finish.

DIFFUSER

A white acrylic cover is located on the bottom of the shade with an optional cover for the top.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.
 C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.


FINISH

The 2068 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

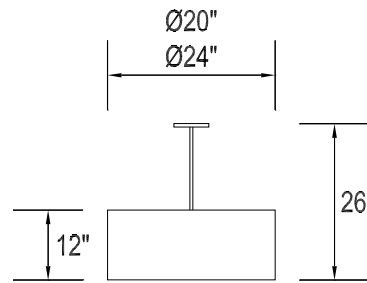

NT finish, BK1 diffuser



ORDERING INFORMATION

2068 - _____
 Model 2. 3. 4. 5. 6. 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. COLOR TEMPERATURE
20 20" dia.	STANDARD	C49 45W C Series LED	TIER 1	35K 3500K standard color temperature
24 24" dia.	BL Black		SN1 Satin Weave - White	27K 2700K color temperature
	BZ Bronze		SN2 Satin Weave - Ivory	30K 3000K color temperature
	GM Gun Metal			40K 4000K color temperature
	MB Metallic Bronze		TIER 2	
	MG Metallic Gold		GR1 Grasscloth - Natural	
	NT Nickel Tone		BK1 Black Linen	
	PL Platinum			
	WH White			
	CUSTOM			
	Provide color sample or RAL code to match			

7. AVAILABLE OPTIONS

90R⁹	90 CRI (3000K only)
BAC¹	Buy American Compliant
DTR⁴	Triac (Line Voltage) Dimming (120V)
ES⁶	ENERGY STAR® (Not available in 90 CRI)
FCL⁷	French Canadian Labels
SVL	Swivel Canopy / Slope Ceiling
T24⁹	Title 24 JA8 Compliant (3000K only)

ACCESSORIES (field installed - order separately)

390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
210002WHA	Top Cover Set: 20 size, White Acrylic
210003WHA	Top Cover Set: 24 size, White Acrylic

Notes: (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24. (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or T24. (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24. (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC.
Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.
Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.