



Woven Black (WBK) diffuser



White Acrylic (WHA) diffuser

2326 LED

Since it's not quite a donut, we've nicknamed this series the "fauxnut."

The one-piece 2326 is constructed of a matte white acrylic outer shell with a flat, inset diffuser opening. Available in a matte white acrylic or woven black fabric diffuser. Integral Battery Backup available on 15" & 20" sizes.

Refer to model 2616 for a suspended version of this product.

FAUXNUT SURFACE

STANDARD SPECIFICATIONS

HOUSING

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and hold" installation of the diffuser.

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum features an inset section and is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

15 Size: R11 - 11W nominal, .09 A input - 1619 lm. Dimmable (0-10V).

15 Size: R18 - 18W nominal, .15 A input - 2588 lm. Dimmable (0-10V).

15 Size: R22 - 22W nominal, .19 A input - 3050 lm. Dimmable (0-10V).

20 Size: R23 - 23W nominal, .19 A input - 2977 lm. Dimmable (0-10V).

20 Size: R34 - 34W nominal, .28 A input - 4387 lm. Dimmable (0-10V).

20 Size: R49 - 49W nominal, .41 A input - 5828 lm. Dimmable (0-10V).

24 Size: R23 - 23W nominal, .19 A input - 3102 lm. Dimmable (0-10V).

24 Size: R34 - 34W nominal, .28 A input - 4569 lm. Dimmable (0-10V).

24 Size: R49 - 49W nominal, .41 A input - 6071 lm. Dimmable (0-10V).

30 Size: R23 - 23W nominal, .19 A input - 2954 lm. Dimmable (0-10V).

30 Size: R34 - 34W nominal, .28 A input - 4352 lm. Dimmable (0-10V).

30 Size: R49 - 49W nominal, .41 A input - 5782 lm. Dimmable (0-10V).

*Testing performed on White Acrylic shade option. WBK fabric decreases lumen output.

MOUNTING

Directly to j-box (by others). Sizes 24"+ are further anchored to ceiling at three points for additional support (anchoring hardware by others).

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

2326	-	-	-	-	-	-	-
Model	2.	3.	4.	5.	6.	(if required)	

2. SIZE	3. WATTAGE	4. DIFFUSER	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS
15 15" dia.	15 SIZE	WHA White Acrylic	35K 3500K standard color temperature	90R ⁰ 90 CRI (30K & 35K only)
20 19.25" dia.	R11 11W R Series LED	WBK Woven Black	27K 2700K color temperature	BAB ¹ Build America, Buy America Compliant (BABAA) (Exclusions: BBI - contact factory)
24 24" dia.	R18 18W R Series LED		30K 3000K color temperature	BAC ¹ Buy American Compliant (BAA)
30 30" dia.	R22 22W R Series LED		40K 4000K color temperature	BBI ^{2*} Integral Battery Backup (8W) (Adds 1.5" to depth (15 & 20 sizes only) Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.
	20, 24, 30 SIZE			DTR ⁴ Triac (Line Voltage) Dimming (120V)
	R23 23W R Series LED			EXT Extended Housing (Intended to match BBI extension) (Adds 1.5" to depth) (15 & 20 sizes only)
	R34 34W R Series LED			FCL ⁷ French Canadian Labels
	R49 49W R Series LED			T24 ⁹ Title 24 JA8 Compliant (30K & 35K only)

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: **BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.


PROJECT:

MODEL #:

FIXTURE TYPE:



WHA diffuser

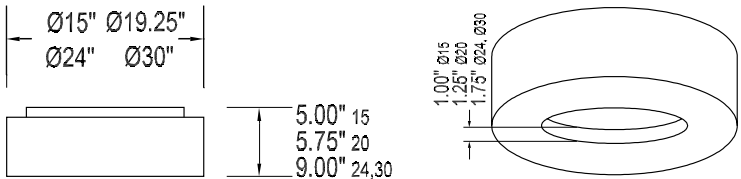

DAMP



RoHS COMPLIANT ELECTRONICS



BROWNLEE LIGHTING

www.brownlee.com

REVISED
2024.12.19