



Nickel Tone (NT) finish

## 2456 LED

The 2456 LED close-to-ceiling pendant pairs nicely with the 2656 LED traditional pendant and the two models are often used in the same space. This series offers a balance between traditional and contemporary, making it perfect for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. This unit provides a generous amount of indirect uplight in addition to downlight.

## FINISHES



# SALEM

## STANDARD SPECIFICATIONS

### BOWL

Smooth UV stabilized white acrylic. The 30" bowl is formed from 0.188" material.

### TRIM

The 36" trim consists of a spun aluminum trim ring, a formed, cold rolled steel ceiling canopy, stainless steel aircraft cables, and a steel stem.

### HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

36 Size: R34 - 34W nominal, .28 A input - 3475 lm. Dimmable (0-10V).

36 Size: R49 - 49W nominal, .41 A input - 4617 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The 2456 series is available in all Brownlee paint finishes as a standard offering.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



NT finish

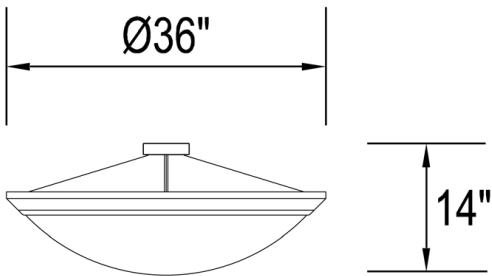

DAMP



## ORDERING INFORMATION

**2456** - - - - -  
Model 2. 3. 4. 5.

### 2. FINISH

#### STANDARD

**BL** Black  
**BZ** Bronze  
**GM** Gun Metal  
**MB** Metallic Bronze  
**MG** Metallic Gold  
**NT** Nickel Tone  
**WH** White

#### CUSTOM

Provide color sample or  
RAL code to match

### 3. WATTAGE

**R34** 34W R Series LED  
**R49** 49W R Series LED

### 4. COLOR TEMPERATURE

**35K** 3500K standard color temperature  
**27K** 2700K color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 5. AVAILABLE OPTIONS

**90R<sup>9</sup>** 90 CRI (30K & 35K only)  
**BAB<sup>1</sup>** Build America, Buy America Compliant (BABAA)  
(Exclusions: BLD, OCC)  
**BAC<sup>1</sup>** Buy American Compliant (BAA)  
**BLD<sup>3</sup>** Bi-Level Dimming  
**DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)  
**FCL<sup>7</sup>** French Canadian Labels  
**OCC<sup>8</sup>** Occupancy Sensor  
**T24<sup>9</sup>** Title 24 JA8 Compliant (30K & 35K only)

**Universal Footnotes (only applies if superscript is shown in Options section):** (0) **90R** - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) **BAC/BAB** - www.brownlee.com/resources/usa. (2) **BBI/BBC** - cannot combine with ECW or EXT. (3) **BLD** - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) **DTR** - cannot combine with BLD. (5) **ECW** - cannot combine with BBI, BBC, or DTR. (7) **FCL** - cannot combine with BAC. (8) **OCC** - integral microwave motion sensor (ON/OFF). (9) **T24** - includes JA8 labeling and 90 CRI LEDs. (10) **PCH/PC4** - cannot combine with BLD or OCC.

**Add'l Notes:** **\*BBI/BBC** - BBI minimum operating temp: 10C/50F unless otherwise stated. **BBC** minimum operating temp: -20C/-4F.

**\*\*BLD** - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

**Specifications subject to change without notice.**



**BROWNLEE**  
LIGHTING

www.brownlee.com

REVISED  
2024.12.19