



2600 LED

The 2600 is far from your ordinary fabric drum. The drum is formed with high quality white acrylic with fabric bonded to its exterior, creating a decorative yet sustainable solution to a variety of challenging lighting applications. Multiple sizes ranging from 15 inches to 48 inches, a variety of fabric options and four suspension methods to choose from. Given the size range, this unit is a spec locker for common areas, offices, conference rooms, libraries, lobbies, corridors and any other area requiring general or high performance illumination. This unit produces a generous amount of indirect light, refer to photometric files. Refer to Model #: 2340 for a surface mount version of this product.

FINISHES

BL	BZ	GM	MB	MG	NT	WH
----	----	----	----	----	----	----

BOOST PENDANT

STANDARD SPECIFICATIONS

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell, with your choice of fabric bonded to its exterior sidewall. The base (bottom) of the drum is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed. See accessories section for recommended Top Cover Set.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

15 Size: R11 - 11W nominal, .09 A input - 1619 lm. Dimmable (0-10V). 82 CRI standard.

15 Size: R18 - 18W nominal, .15 A input - 2588 lm. Dimmable (0-10V). 82 CRI standard.

15 Size: R22 - 22W nominal, .19 A input - 3050 lm. Dimmable (0-10V). 82 CRI standard.

20 Size: R23 - 23W nominal, .19 A input - 2977 lm. Dimmable (0-10V). 82 CRI standard.

20 Size: R34 - 34W nominal, .28 A input - 4387 lm. Dimmable (0-10V). 82 CRI standard.

20 Size: R49 - 49W nominal, .41 A input - 5828 lm. Dimmable (0-10V). 82 CRI standard.

24 Size: R34 - 34W nominal, .28 A input - 4569 lm. Dimmable (0-10V). 82 CRI standard.

24 Size: R49 - 49W nominal, .41 A input - 6071 lm. Dimmable (0-10V). 82 CRI standard.

30 Size: R34 - 34W nominal, .28 A input - 4352 lm. Dimmable (0-10V). 82 CRI standard.

30 Size: R49 - 49W nominal, .41 A input - 5782 lm. Dimmable (0-10V). 82 CRI standard.

36 Size: C49 - 45W nominal, .40 A input - 5878 lm. Dimmable (0-10V). 82 CRI standard.

36/48 Size: H63 - 63W nominal, .53 A input - 7429 lm. Dimmable (0-10V). 90 + CRI standard.

*Testing performed on White Acrylic shade option. Darker fabrics decrease lumen output.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

SUSPENSION SYSTEM

The 2600 Series is available in multiple colors and four suspension methods:

CC1 – Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. Recommended for pendants up to 36"Ø only.

CC3 – Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

SCM – Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

SSM – Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. Recommended for pendants up to 36"Ø only.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

DIFFUSERS



White Acrylic



White Linen



Natural Linen



Grey Linen




Woven Black



One-piece acrylic shades. Contact factory for sample swatches.



DIMENSIONAL DRAWING

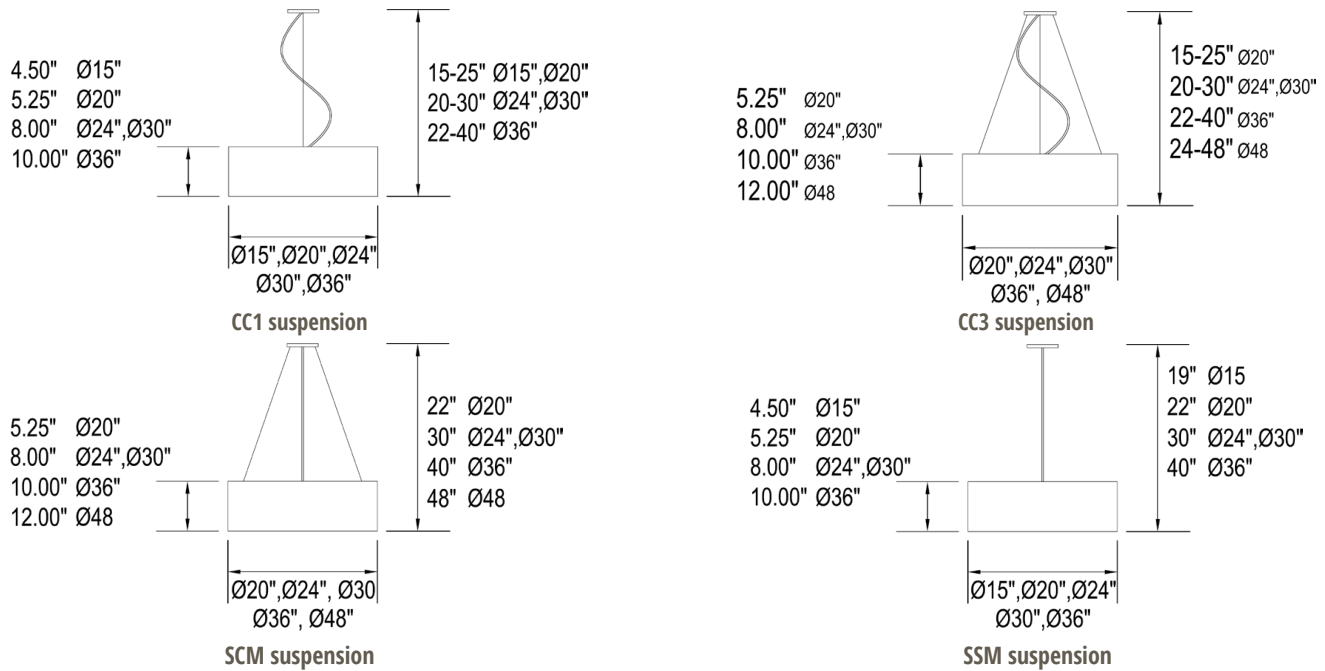

DAMP



RoHS
COMPLIANT
ELECTRONICS



ORDERING INFORMATION

2600

Model

2.

3.

4.

5.

6.

7.

8. (if required)

2. SIZE

15	15" dia.
20	19.25" dia.
24	24" dia.
30	30" dia.
36	36" dia.
48	48" dia.

3. FINISH

CC1 & CC3

BL	Black
NT	Nickel Tone
WH	White

SCM & SSM

BL	Black
BZ	Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
WH	White

4. WATTAGE

15 SIZE

R11	11W R Series LED
R18	18W R Series LED
R22	22W R Series LED

20 SIZE

R23	23W R Series LED
R34	34W R Series LED
R49	49W R Series LED

24 & 30 SIZE

R34	34W R Series LED
R49	49W R Series LED

36 SIZE

C49	45W C Series LED
H63	63W H Series LED

48 SIZE

H63	63W H Series LED
-----	------------------

*Contact factory for higher lumen packages.

5. DIFFUSER

WHA	White Acrylic
GYL	Grey Linen
NAL	Natural Linen
WBK	Woven Black
WHL	White Linen

6. SUSPENSION

CC1	Cord & Single Cable (All except 48 size)
CC3	Cord & Three Cable
SCM	Stem & Cable Mount
SSM	Single Stem Mount (All except 48 size)

7. COLOR TEMPERATURE

35K	3500K standard color temperature
27K	2700K color temperature (All except H63)
30K	3000K color temperature
40K	4000K color temperature

8. AVAILABLE OPTIONS

90R ⁹	90 CRI (R-Series Wattages: 30K & 35K only) (C-Series Wattages: 30K only)
BAB ¹	Build America, Buy America Compliant (BABAA) (Exclusions: CE2, 15 & 20 sizes)
BAC ¹	Buy American Compliant (BAA)
CE1	3' - 10' Cord/Cable Extension (CC1 & CC3 only)
CE2	10' - 20' Cord/Cable Extension (CC1 & CC3 only)
DTR ⁴	Triac (Line Voltage) Dimming (120V)
FCL ⁷	French Canadian Labels
T24 ⁹	Title 24 JA8 Compliant (R-Series Wattages: 30K & 35K only) (C-Series Wattages: 30K only) (Unavailable in H63)

-Note: Contact factory for Battery Backup.

ACCESSORIES (field installed - order separately)

390001xx	SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
320029WHA	Top Cover Set: 24 size, White Acrylic // 320030WHA Top Cover Set: 30 size, White Acrylic
320031WHA	Top Cover Set: 36 size, White Acrylic // 320033WHA Top Cover Set: 48 size, White Acrylic

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.