



White Acrylic (WHA) diffuser

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum features an inset section and is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

15 Size: R11 - 11W nominal, .09 A input - 1619 lm. Dimmable (0-10V).
15 Size: R18 - 18W nominal, .15 A input - 2588 lm. Dimmable (0-10V).
15 Size: R22 - 22W nominal, .19 A input - 3050 lm. Dimmable (0-10V).
20 Size: R23 - 23W nominal, .19 A input - 2977 lm. Dimmable (0-10V).
20 Size: R34 - 34W nominal, .28 A input - 4387 lm. Dimmable (0-10V).
20 Size: R49 - 49W nominal, .41 A input - 5828 lm. Dimmable (0-10V).
24 Size: R34 - 34W nominal, .28 A input - 4569 lm. Dimmable (0-10V).
24 Size: R49 - 49W nominal, .41 A input - 6071 lm. Dimmable (0-10V).
30 Size: R34 - 34W nominal, .28 A input - 4352 lm. Dimmable (0-10V).
30 Size: R49 - 49W nominal, .41 A input - 5782 lm. Dimmable (0-10V).

*Testing performed on White Acrylic shade option. WBK fabric decreases lumen output.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

SUSPENSION SYSTEM

The 2616 Series is available in multiple finishes and four suspension methods:

CC1 - Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. Recommended for pendants up to 36"Ø only.

CC3 - Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

SCM - Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.


SSM - Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. Recommended for pendants up to 36"Ø only.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

FAUXNUT PENDANT

DIMENSIONAL DRAWING

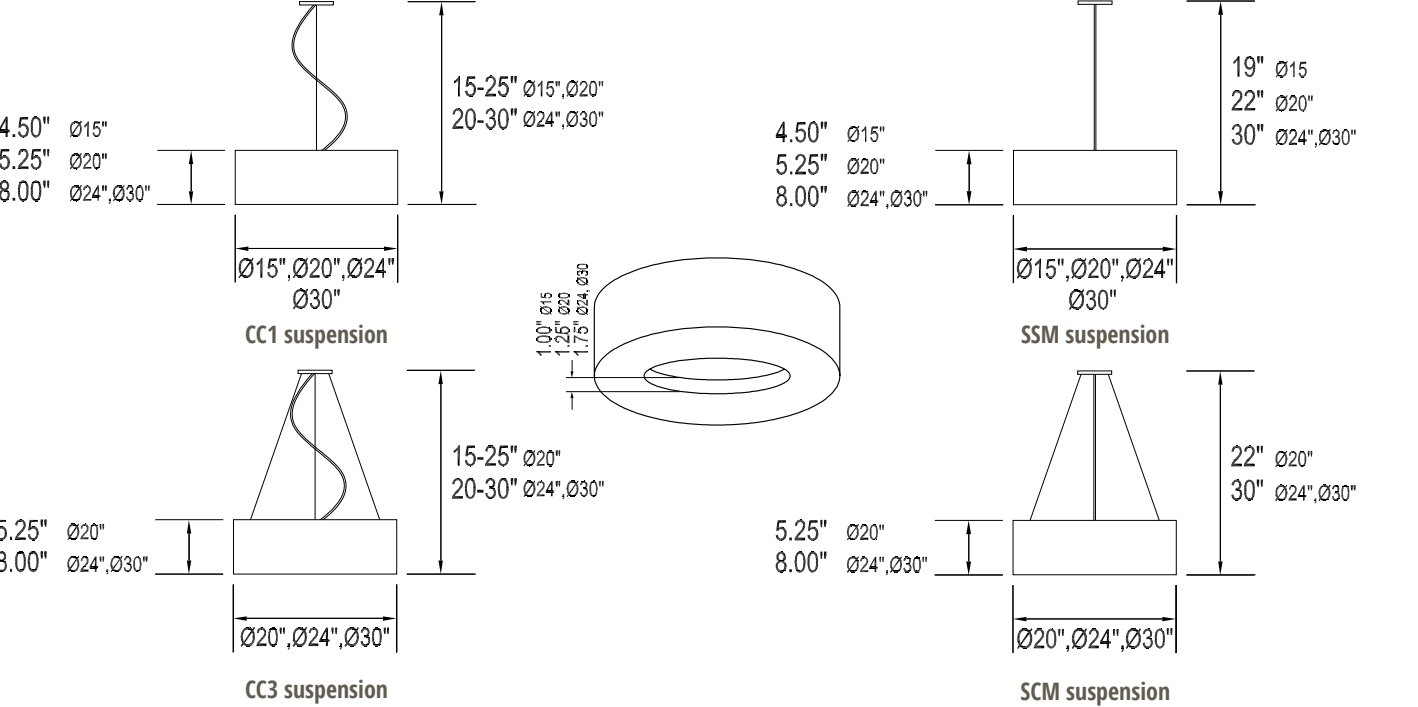

PROJECT:

MODEL #:

FIXTURE TYPE:

ORDERING INFORMATION

2616

Model

2.

3.

4.

5.

6.

7.

8. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	7. COLOR TEMPERATURE
15 15" dia.	CC1 & CC3 BL Black NT Nickel Tone WH White	15 SIZE R11 11W R Series LED R18 18W R Series LED R22 22W R Series LED	WHA White Acrylic WBK Woven Black	35K 3500K standard color temperature 27K 2700K color temperature 30K 3000K color temperature 40K 4000K color temperature
20 19.25" dia.		20 SIZE R23 23W R Series LED R34 34W R Series LED R49 49W R Series LED		8. AVAILABLE OPTIONS 90R ⁰ 90 CRI (30K & 35K only) BAB ¹ Build America, Buy America Compliant (BABAA) BAC ¹ Buy American Compliant (BAA) CE1 3' - 10' Cord/Cable Extension (CC1 & CC3 only) CE2 10' - 20' Cord/Cable Extension (CC1 & CC3 only) DTR ⁴ Triac (Line Voltage) Dimming (120V) FCL ⁷ French Canadian Labels T24 ⁹ Title 24 JA8 Compliant (30K & 35K only)
24 24" dia.		24 & 30 SIZE R34 34W R Series LED R49 49W R Series LED		
30 30" dia.				
3. FINISH	4. WATTAGE	5. DIFFUSER	7. COLOR TEMPERATURE	8. AVAILABLE OPTIONS
SCM & SSM BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone WH White		6. SUSPENSION CC1 Cord & Single Cable CC3 Cord & Three Cable (All except 15 size) SCM Stem & Cable Mount (All except 15 size) SSM Single Stem Mount		

ACCESSORIES (field installed - order separately)

390001xx	SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
320029WHA	Top Cover Set: 24 size, White Acrylic
320030WHA	Top Cover Set: 30 size, White Acrylic

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.

2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.