




26" Size, BL Finish, CC1 Susp.

2640 LED

The Outline series is constructed of a low-profile white acrylic drum, with four laser cut cold rolled steel decorative trim pieces assembled to its outer wall. LED assembly (housing) covers the entire top surface of the drum to minimize dust/debris entry. Perfect for open office layouts, conference rooms, schools/libraries, hotel common areas, and more. Refer to model #: 2440 for surface mount.

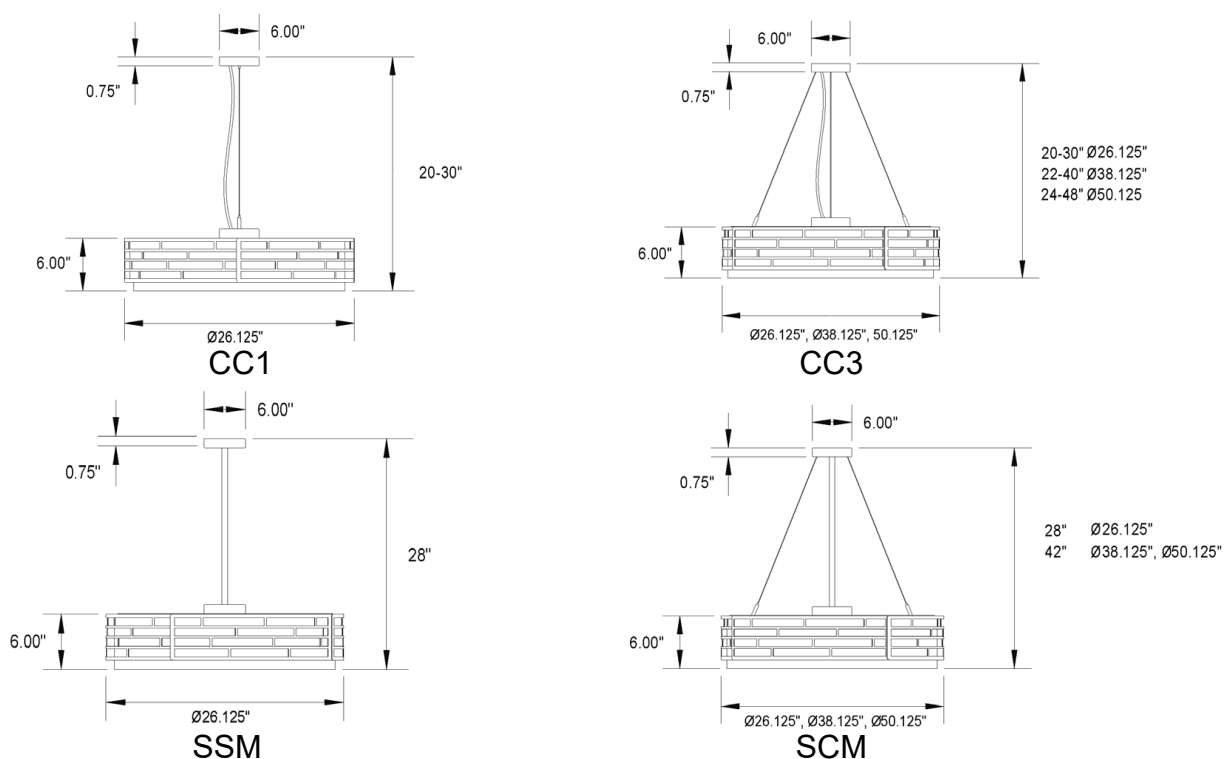

OUTLINE PENDANT

STANDARD SPECIFICATIONS - 2640 PENDANT

DIFFUSER

6" h low-profile white acrylic drum, with four laser cut cold rolled steel decorative trim pieces assembled to its outer wall. The base (bottom) of the diffuser is constructed of high transmission matte white acrylic.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white. The housing covers the entire top surface of the drum. No need for top cover.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F
Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

LOW OUTPUT

26": H30 - 30W nominal, .27 A input - 3850 lm. Dimmable (0-10V).
38": H70 - 70W nominal, .59 A input - 7525 lm. Dimmable (0-10V).
50": H110 - 110W nominal, .94 A input - 11970 lm. Dimmable (0-10V).

HIGH OUTPUT

26": H63 - 63W nominal, .53 A input - 6690 lm. Dimmable (0-10V).
38": H136 - 136W nominal, 1.20 A input - 15045 lm. Dimmable (0-10V).
50": H215 - 215W nominal, 1.86 A input - 23945 lm. Dimmable (0-10V).

SUSPENSION SYSTEM

CC1 - Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. (26" size only).

CC3 - Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

SSM - Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. (26" size only).

SCM - Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

ORDERING INFORMATION

2640	Model	2.	3.	4.	5.	6.	7.	8. (if required)
2. SIZE	3. TRIM FINISH	4. WATTAGE	5. SUSPENSION FINISH	7. COLOR TEMPERATURE				
26 26" dia.	Note: Finish applies to shade cage only.	26 SIZE	CC1 & CC3 ONLY	35K 3500K standard color temperature				
38 38" dia.	BL Black	H30 30W H Series LED	Note: Finish applies to power cord and ceiling canopy.	30K 3000K color temperature				
50 50" dia.	BU Pastel Blue (RAL 5024)	H63 63W H Series LED	BLC Black Cord	40K 4000K color temperature				
Nominal sizes listed above. Refer to line drawing.	BZ Bronze	38 SIZE	GYC Grey Cord					
	GN Pastel Green (RAL 6019)	H70 70W H Series LED	WHC White Cord					
	MG Metallic Gold	H136 136W H Series LED	SSM & SCM ONLY					
	NT Nickel Tone	50 SIZE	Note: Finish applies to stem and ceiling canopy.					
	RD Red (RAL 3020)	H110 110W H Series LED	BL Black					
	YL Yellow (RAL 1018)	H215 215W H Series LED	BU Pastel Blue (RAL 5024)					
	WH White		BZ Bronze					
			GN Pastel Green (RAL 6019)					
			MG Metallic Gold					
			NT Nickel Tone					
			RD Red (RAL 3020)					
			YL Yellow (RAL 1018)					
			WH White					
ACCESSORIES (field installed - order separately)								
390001xx	SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)							
390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)							
		6. SUSPENSION						
		CC1 Cord & Single Cable (26" size only)						
		CC3 Cord & Three Cable						
		SSM Single Stem Mount (26" size only)						
		SCM Stem & Cable Mount						

PROJECT:

MODEL #:

FIXTURE TYPE:



MOUNTING

26" size: directly to j-box (by others). Hardware included.
38" & 50" sizes: anchored to ceiling. Anchor plate included.
Anchoring hardware not included. Trim pieces (4) around shade are field-installed to minimize damage in transit. Refer to model #: 2440 for a surface mount version of this product.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.



DAMP

RoHS
COMPLIANT
ELECTRONICS



Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI standard over 2025. Inquire for this model's availability. (1) BAC/BAB - www.brownlee.com/resources/usa. (2) BBI/BBC - cannot combine with ECW or EXT. (3) BLD - integral microwave motion sensor (step-dim). Cannot combine with DTR. (4) DTR - cannot combine with BLD. (5) ECW - cannot combine with BBI, BBC, or DTR. (7) FCL - cannot combine with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs. (10) PCH/PC4 - cannot combine with BLD or OCC.

Add'l Notes: *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.

**BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.



BROWNLEE
LIGHTING

www.brownlee.com

REVISED
2024.12.19