



Nickel Tone (NT) finish, Cable Guide - Mid (CG2) suspension

2654 LED

The 2654 LED offers a balance between traditional and contemporary, making it perfect for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. The aircraft cables can be specified in three different positions to fit the aesthetic needs of the space. This unit provides a generous amount of indirect uplight in addition to downlight.

FINISHES



FULTON

STANDARD SPECIFICATIONS

BOWL

Smooth UV stabilized white acrylic. The 24" bowl is formed from 0.188" material, while the 30" bowl utilizes 0.250" stock.

TRIM

The trim consists of a formed, cold rolled steel ceiling canopy, stainless steel aircraft cables, three solid brass finials, and a steel stem.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
 C24 - 23W nominal, .20 A input - 2958 lm. Dimmable (0-10V).
 C37 - 35W nominal, .30 A input - 4460 lm. Dimmable (0-10V).
 C49 - 45W nominal, .40 A input - 5916 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.


FINISH

The 2654 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

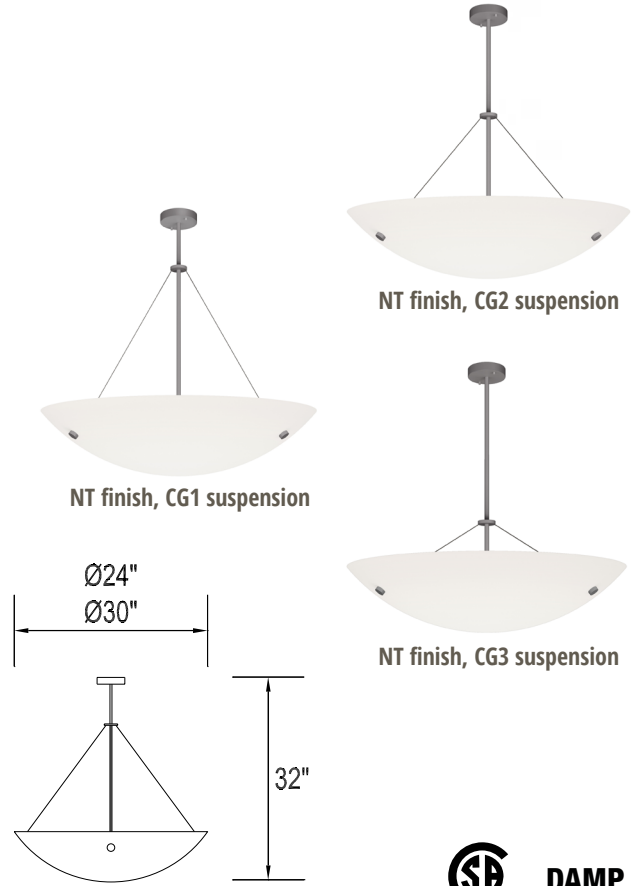

ORDERING INFORMATION

2654 - Model - 2. - 3. - 4. - 5. - 6. - 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. SUSPENSION	6. COLOR TEMPERATURE	7. AVAILABLE OPTIONS
24 24" dia. 30 30" dia.	STANDARD BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	24 SIZE C24 23W C Series LED C37 35W C Series LED C49 45W C Series LED 30 SIZE C37 35W C Series LED C49 45W C Series LED	CG1 Cable Guide - High CG2 Cable Guide - Mid CG3 Cable Guide - Low	35K 3500K standard color temperature 27K 2700K color temperature 30K 3000K color temperature 40K 4000K color temperature	90R⁰ 90 CRI (3000K only) BAC¹ Buy American Compliant DTR⁴ Triac (Line Voltage) Dimming (120V) ES⁶ ENERGY STAR [®] (Not available in 90 CRI) FCL⁷ French Canadian Labels SVL Swivel Canopy

ACCESSORIES (FIELD INSTALLED)

ORDERING NUMBER	DESCRIPTION
390002XX	Stem Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)

Notes: (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24. (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or T24. (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24. (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC.
Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

