



Nickel Tone (NT) finish, Single Stem Mount (SSM) suspension

2658 LED

The 2658 LED features a clean and minimal suspension system which makes this unit a good fit for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. Two suspension styles to choose from. This unit provides a generous amount of indirect uplight in addition to downlight.

FINISHES



Nickel Tone (NT) finish, Triple Stem Mount (TSM) suspension

BASIN

STANDARD SPECIFICATIONS

BOWL

Smooth UV stabilized white acrylic. The 24" bowl is formed from 0.188" material, while the 30" bowl utilizes 0.250" stock.

TRIM

The trim consists of a formed, cold rolled steel ceiling canopy, steel stems, and a solid brass decorative finial.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

C24 - 23W nominal, .20 A input - 2958 lm. Dimmable (0-10V).

C37 - 35W nominal, .30 A input - 4460 lm. Dimmable (0-10V).

C49 - 45W nominal, .40 A input - 5916 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2658 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

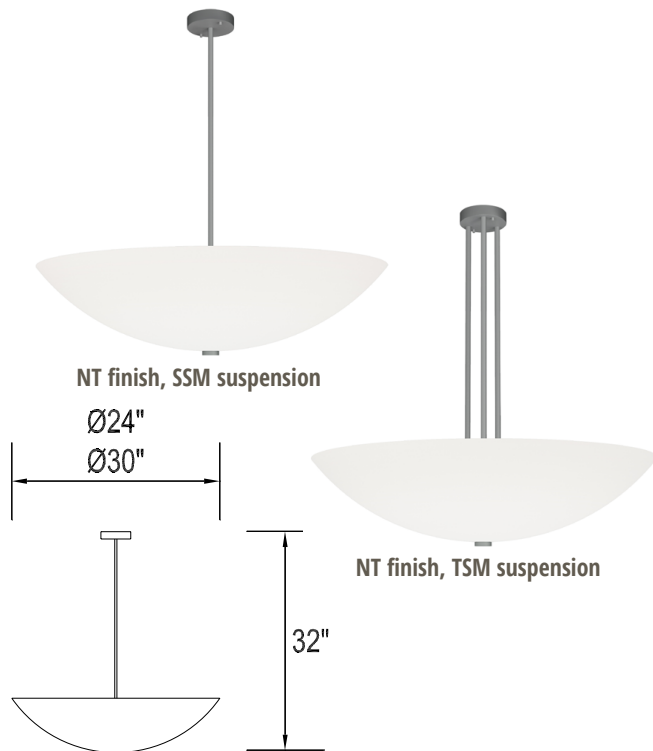

DAMP



ORDERING INFORMATION

2658 - Model 2. 3. 4. 5. 6. 7. (if required)

2. SIZE

24 24" dia.
30 30" dia.

3. FINISH

STANDARD
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
WH White

CUSTOM
Provide color sample or
RAL code to match

4. WATTAGE

24 SIZE
C24 23W C Series LED
C37 35W C Series LED
C49 45W C Series LED

30 SIZE
C37 35W C Series LED
C49 45W C Series LED

5. SUSPENSION

SSM Single Stem Mount
TSM Triple Stem Mount

6. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

7. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant (BAA)
DTR⁴ Triac (Line Voltage) Dimming (120V)
FCL⁷ French Canadian Labels
SVL Swivel Canopy (SSM) only
T24⁹ Title 24 JA8 Compliant (C24 & C49 in 3000K only)

ACCESSORIES (FIELD INSTALLED)

ORDERING NUMBER	DESCRIPTION
390002xx	Stem Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx). Triple Stem Mount (TSM) requires three sets.

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT.
(3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD or T24.
(5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC.
(8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with DTR or ES.
(10) BBS - cannot be combined with BLD, ECW, EXT, or OCC. (11) PCH/PC4 - cannot be combined with BLD or OCC.
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50%, 30%, 20% or 10%. 3: Remain in continuous dimmed state or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.