

# UP-DOWN

## STANDARD SPECIFICATIONS

### HOUSING

Cold rolled steel, die-formed and assembled with hardware and welds, and can be mounted horizontally or vertically. The end caps and the front baffle are die-formed, and secure the diffuser to the housing with nuts.

### DIFFUSER

Translucent UV stabilized white acrylic. The extruded diffuser slips into a designed track to ensure it stays in position, and the material can withstand minor impact without breaking.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.  
H32 - 32W nominal, .26 A input - 4119 lm - 130 lm/W. Dimmable (0-10V).  
H63 - 63W nominal, .53 A input - 8056 lm - 130 lm/W. Dimmable (0-10V).

### MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

### FINISH

The 5060 series housing is finished in a plated white finish. The finish for this series is suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

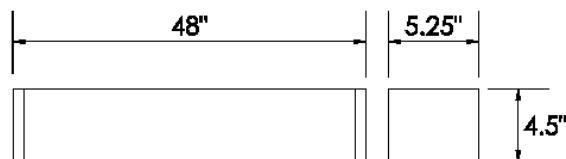

DAMP

## ORDERING INFORMATION

5060

Model

2.

3.

4. (if required)

### 2. WATTAGE

**H32** 32W H Series LED (uplight & downlight)  
**H63** 63W H Series LED (uplight & downlight)

### 3. COLOR TEMPERATURE

**35K** 3500K standard color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 4. AVAILABLE OPTIONS

**90R<sup>0</sup>** 90 CRI (3000K only)  
**2CT** Dual Independent Circuits (H63 only)  
**BAC<sup>1</sup>** Buy American Compliant  
**BBI<sup>2\*</sup>** Integral Battery Backup (8W) (H32 only)  
*Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.*  
**DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)  
**ES<sup>6</sup>** ENERGY STAR® (H32 only) (Not available in 90 CRI)  
**PCH<sup>10</sup>** Pull Chain: On, Off (120V)  
**PC4<sup>10</sup>** 4 Position Pull Chain: Uplight & Downlight, Uplight Only, Downlight Only, Off (H63 only) (120V)  
**FCL<sup>7</sup>** French Canadian Labels

**Note:** For separate control of the uplight and downlight components, please specify H63 and 2CT.

**Universal Footnotes (only applies if option is listed on spec sheet):** (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. \*\*BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

 **BROWNLEE**  
LIGHTING  
www.brownlee.com

REVISED  
2023.05.31