

UP-DOWN

STANDARD SPECIFICATIONS

HOUSING

Cold rolled steel, die-formed and assembled with hardware and welds, and can be mounted horizontally or vertically. The end caps and the front baffle are die-formed, and secure the diffuser to the housing with nuts.

DIFFUSER

Translucent UV stabilized white acrylic. The extruded diffuser slips into a designed track to ensure it stays in position, and the material can withstand minor impact without breaking.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.
H32 - 32W nominal, .26 A input - 4119 lm - 130 lm/W. Dimmable (0-10V).
H63 - 63W nominal, .53 A input - 8056 lm - 130 lm/W. Dimmable (0-10V).

MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH

The 5060 series housing is finished in a plated white finish. The finish for this series is suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

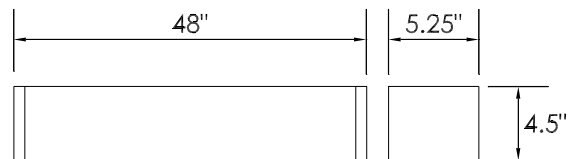

DAMP

ORDERING INFORMATION

5060

Model

2.

3.

4. (if required)

2. WATTAGE

H32 32W H Series LED (uplight & downlight)
H63 63W H Series LED (uplight & downlight)

3. COLOR TEMPERATURE

35K 3500K standard color temperature
30K 3000K color temperature
40K 4000K color temperature

4. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
2CT Dual Independent Circuits (H63 only)
BAC¹ Buy American Compliant
BBI^{2*} Integral Battery Backup (H32 only)
DTR⁴ Triac (Line Voltage) Dimming (120V)
ES⁶ ENERGY STAR[®] (H32 only) (Not available in 90 CRI)
PCH¹¹ Pull Chain: On, Off (120V)
PC4¹¹ 4 Position Pull Chain: Uplight & Downlight, Uplight Only, Downlight Only, Off (H63 only) (120V)
FCL⁷ French Canadian Labels

Note: For separate control of the uplight and downlight components, please specify H63 and 2CT.

Notes: (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24. (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or T24. (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24. (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC.
Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

 **BROWNLEE**
LIGHTING
www.brownlee.com

REVISED
2021.11.08