

GRAND

STANDARD SPECIFICATIONS

ENDS

Molded resin acrylic, secured to the diffuser with a two part adhesive, and the diffuser assembly snaps in place over spring steel clips for tool less maintenance.

HOUSING

Cold rolled steel, die-formed assembly. The housing can be mounted horizontal or vertical.

DIFFUSER

UV stabilized white acrylic. The material can withstand minor impact without breaking.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H16 - 16W nominal, .14 A input - 1763 lm. Dimmable (0-10V).

H25 - 25W nominal, .20 A input - 2603 lm. Dimmable (0-10V).

H32 - 32W nominal, .26 A input - 3490 lm. Dimmable (0-10V).

MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH

The 5150 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



BZ endcaps, WHA diffuser

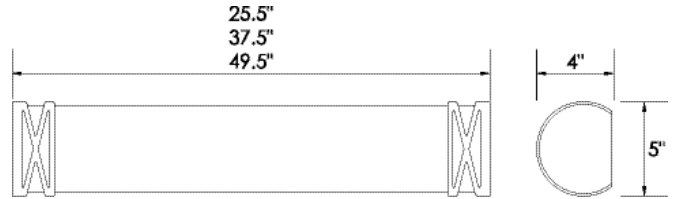

DAMP



ORDERING INFORMATION

5150 - _____
 Model 2. 3. 4. 5. 6. (if required)

2. SIZE	3. END CAPS	4. WATTAGE	5. COLOR TEMPERATURE
26 L: 25.5"	STANDARD BL Black BZ Bronze GM Gun Metal MB Metallic Bronze NT Nickel Tone PL Platinum WH White	26 SIZE H16 16W H Series LED	35K 3500K standard color temperature 30K 3000K color temperature 40K 4000K color temperature
38 L: 37.5"		38 SIZE H25 25W H Series LED	6. AVAILABLE OPTIONS 90R ⁰ 90 CRI BAC ¹ Buy American Compliant BBI ^{2*} Integral Battery Backup (8W) (H25 & H32 only) <i>Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.</i> DTR ⁴ Triac (Line Voltage) Dimming (120V) ES ⁶ ENERGY STAR [®] (Not available in 90 CRI) FCL ⁷ French Canadian Labels T24 ⁹ Title 24 JA8 Compliant
50 L: 49.5"		50 SIZE H32 32W H Series LED	
CUSTOM Provide color sample or RAL code to match			

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches. **Specifications and dimensions subject to change without notice.**
 Consult your Brownlee Lighting representative for availability and ordering information.